



FAA Approved Facility


P/N: CDMA-8PB-L-20-1880K9R60FA, Item 789a (8CX7-1920-X140 S11)

20 watts CDMA Band Pass Filter

Antenna Mounts/Adapters: <http://www.antcom.com/documents/catalogs/PeripheralAntennaProducts2.pdf>



ANTCOM CORPORATION . 367 Van Ness Way, Suite 602 . Torrance, CA 90501 . Tel: (310) 782-1076 . Fax: (310) 782-1086 . E-mail: antennas@antcom.com . <http://www.antcom.com>

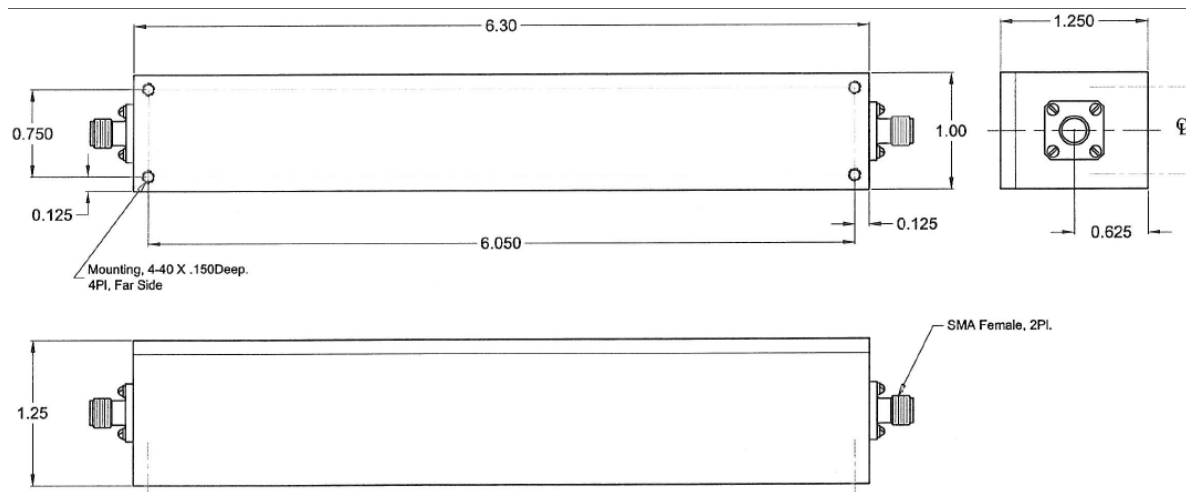

Pass Band (MHz): (1850 - 1990)
3-dB BW (MHz): (1845 - 1995)
Selectivity BW (MHz): (1783 - 2056)
Selectivity (dB): >50 (>57 Measured)
Insertion Loss (dB): <1 (<0.6 measured)
CW Power Handling: 20W
Connectors: SMA Female
Size: 1.0" x 1.25" x 6.05"

