

7

6

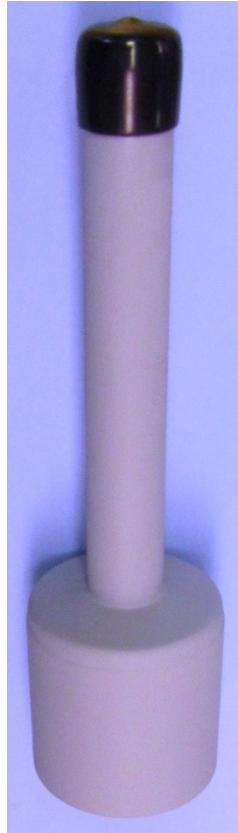
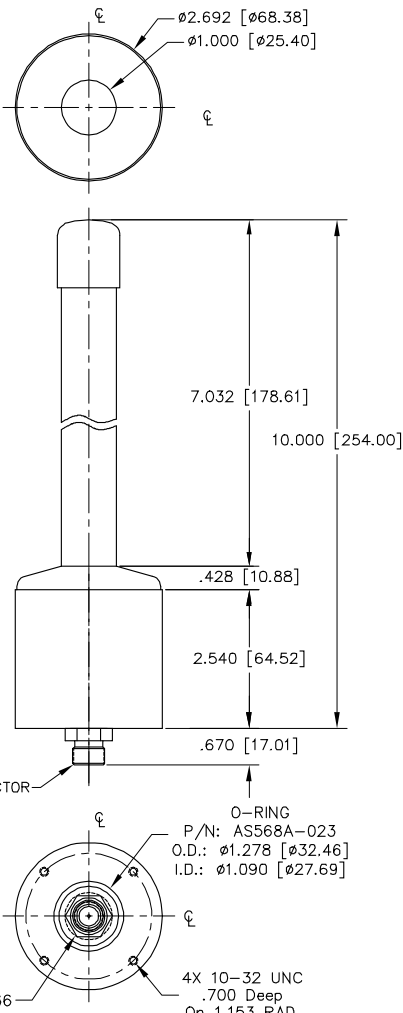
5

4

3

2

1

Ø2.692 [Ø68.38]
Ø1.000 [Ø25.40]

7.032 [178.61]
10.000 [254.00]

.428 [10.88]
2.540 [64.52]
.670 [17.01]

O-RING
P/N: AS568A-023
O.D.: Ø1.278 [Ø32.46]
I.D.: Ø1.090 [Ø27.69]

4X 10-32 UNC
.700 Deep
On 1.153 RAD.

CLEARANCE DIA. .866

DGO CONNECTOR

REVISIONS

ZONE	REV	DESCRIPTION	DATE	APPROVED

SPECIFICATIONS

ELECTRICAL:

FREQUENCY:	(2.40-2.50) GHz
RADIATION PATTERN:	OMNI
POLARIZATION:	VERTICAL
VSWR:	2.0:1
GAIN (dB):	(3 to 5) dBi
ELE. BEAM WIDTH:	DIPOLE
AZ. BEAM WIDTH:	360 deg.
IMPEDANCE:	50 Ohms
POWER HANDLING:	200 Watt

MECHANICAL:

SIZE: BASE DIAMETER = 2.692 in. [68.38 mm],
HEIGHT = 10.00 in [254.00mm]

WEIGHT: 1.4 lbs. (635 g)

FINISH: SKYDROL RESISTANT POLYURETHANE ENAMEL
BASE IRIDITE PER MIL-C-5441

MATERIAL: 6061-T6 ALUMINUM ALLOY BASE
COMPOSITE RADOME, IMPACT, ABRASION, UV, SOLVENT,
SKYDROL RESISTANCE, AND FIRE RETARDANT

CONNECTOR: DGO FEMALE
(OPTION: SMA, TNC, N, BNC)

ENVIRONMENTAL:

TEMPERATURE: -67 °F TO +185 °F [-55 °C TO +85 °C]

ALTITUDE: 70,000 ft.

VIBRATION: > 30 G's

LEAKAGE: HERMETICALLY SEAL

FEDERAL & MILITARY SPECIFICATIONS:

DESIGN TO: FAA TSO-C144, DO-160D, D0-228, MIL-C-5541,
MIL-E-5400, MIL-I-45208A, MIL-STD-810, AND SAE J1455

ACCEPTANCE TEST PROCEDURE: ATP-GPS-L1L2-100

QTY	DESCRIPTION	PART NO	MATERIAL	ITEM
1	O-RING	AS568A-023, Item 553-023		2
4	SCREW, 10-32, 1.125"L	91772A834, Item 544-834		1

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
FRACTIONS SHALL BE IN 16ths
± 1/64
DECIMALS ± .005
ANGLES ± 1°

TOLERANCE SURF PER ANSI Y14.5
BREAK EXTERNAL EDGES .005 TO .015
FILED & CHAMFER TO R .010
SCREW THREADS PER MIL-S-8878
DATE ON A COMBINE & OF .005
MACHINED SURFACES ± .005

DO NOT SCALE DRAWING

ANTCOM CORP. TORRANCE, CALIFORNIA

S-Band
OMNI ANTENNA

REV: 1
DATE: 8/25/16
DRAWN BY: P. TRIAN
CHECKED BY: S. HUYNH
APPROVED BY: S. HUYNH
DATE: Sept-30-14

QTY: 1
DATE: 8/25/16
PART NO: 102-2.40-2.50V-XDGO-UU-5dB
SCALE: 1/1
SHEET 1 OF 1

7

6

5

4

3

2

1

FREQUENCY (GHz): 1.61-1.63; (1610-1630) MHz; 1.61-1.85; (1610-1850) MHz; 1.80-1.99; (1800-1990) MHz; 2.40-2.50; (2400-2500) MHz; 4.40-5.85; (4400-5850) MHz; X,XX-Y,YY;(X,XX-Y,YY) GHz

POLARIZATION: V: VERTICAL; L: LHCP; R: RHCP

CONNECTOR: S: SMA; P: PINS; M: MCK; MM: MMCK; N: N; NB: N-Bulkhead; T: TNC; TB: TNC-Bulkhead; DGO: DGO

COLOR: -1: GLOSS WHITE #17925 PER FED-STD-595B; -2: LUSTERLESS GRAY #36320 PER FED-STD-595B; -3: OLIVE DRAB GREEN #34031 PER FED-STD-595B; -4: LUSTERLESS BLACK #37038 PER FED-STD-595B; -5: TAN #33446 PER FED-STD-595B; UU: Gray Color Teflon Coating

P/N: 102-2.40-2.50V-XDGO-UU-5dB