


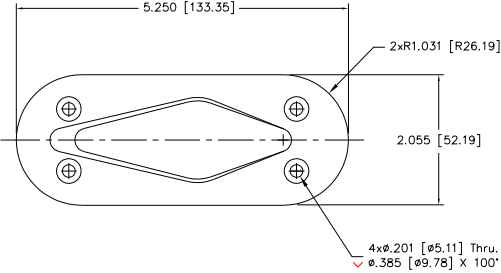
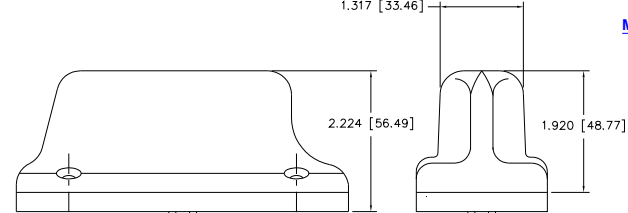
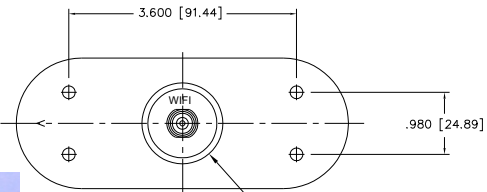


7 6 5 4 3 2 1

NOTICE OF PROPRIETARY RIGHTS
 THIS DOCUMENT CONTAINS CONFIDENTIAL, TECHNICAL DATA INCLUDING TRADE SECRETS PROPRIETARY TO ANTCOM CORP. DISCLOSURE OF THIS DATA TO YOU IS EXPRESSLY CONDITIONED UPON YOUR AGREEMENT THAT ITS USE IS LIMITED TO USE WITH YOUR COMPANY ONLY AND DOES NOT INCLUDE MANUFACTURE OR PROCESSING. ANY OTHER USE IS EXPRESSLY PROHIBITED WITHOUT PRIOR WRITTEN CONSENT OF ANTCOM CORP.

5.250 [133.35]
 2xR1.031 [R26.19]
 2.055 [52.19]
 4xø.201 [ø5.11] Thru.
 ø.385 [ø9.78] x 100"
 1.317 [33.46]
 2.224 [56.49]
 1.920 [48.77]
 TNC FEMALE CONNECTOR
 (Option: SMA, TNC, or N)
 3.600 [91.44]
 .980 [24.89]
 2x O-RING GROOVE

SPECIFICATIONS

ELECTRICAL:

FREQUENCY (GHz):	WIFI (2400-2500)
RADIATION PATTERN:	OMNIDIRECTIONAL
POLARIZATION:	VERTICAL
VSWR:	2.0:1
IMPEDANCE:	50 ohms
ANTENNA GAIN (dBic):	> 2 dB
LIGHTNING PROTECTION:	DC GROUNDING

MECHANICAL:

SIZE: WIDTH 2.05 in. [52.2 mm], LENGTH 5.25 in. [133.4 mm], HEIGHT 2.22 in. [56.5 mm]

WEIGHT: 7.4 oz. (210g)

FINISH: SKYDROL RESISTANT POLYURETHANE ENAMEL BASE IRIDITE PER MIL-C-5541F

COLOR: LUSTERLESS GRAY #36320 PER FED-STD-595B
 GLOSS WHITE #17925 PER FED-STD-595B
 OLIVE DRAB GREEN #34031 PER FED-STD-595B
 LUSTERLESS BLACK #37038 PER FED-STD-595B

MATERIAL: 6061-T6 ALUMINUM ALLOY BASE COMPOSITE RADOME, IMPACT, ABRASION, UV, SOLVENT, SKYDROL RESISTANCE, AND FIRE RETARDANT

CONNECTOR: TNC-FEMALE (OPTION: SMA, N, BNC)

MOUNTING: FLAT FIXED MOUNT; O-RING & 10-32 MOUNTING SCREWS ARE PROVIDED

ENVIRONMENTAL:

TEMPERATURE: -67°F TO +185°F [-55°C TO +85°C]

ALTITUDE: 70,000 ft.

VIBRATION: 30 G's

LEAKAGE: HERMETICALLY SEALED

FEDERAL & MILITARY SPECIFICATIONS:

FAA TSO-C144, DO-160D, D0-228, MIL-C-5541, MIL-STD-461E/F, SAE J1455 MIL-E-5400, MIL-I-45208A, MIL-STD-810, MIL-S-901D, MIL-STD-167-1A

2. O-RING AND MOUNTING SCREWS ARE SUPPLIED BY ANTCOM CORPORATION

1. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS [mm]

NOTES: UNLESS OTHERWISE SPECIFIED:

P/N: 2B24V-P-XT-1

SIZE:	Frequency	Other Band	GPS/RX only LNA:	DC BLOCK/LIMITER:
1: 2" SQ.	15: L1 GPS	C: (4.4-5.9) GHz	A2: WITH +20 dB LNA	DL: WITH DC BLOCK & WITH LIMITER
1.9: 1.9" SQ.	1215: L1/L2 GPS	24: (2.4-2.5) GHz	A3: WITH +33 dB LNA	
2: 2.6" DIA.	GS: L1/L2 GPS/Glonass	L: (1.6-2.0) GHz	P: WITHOUT LNA	BLANK WITHOUT DC BLOCK NOR LIMITER
3: 3.3" DIA.		L/S: (1.6-2.5) GHz		
4: MINI ARINC		GSM: (810-996) MHz		
		QB: (0.810-2.5) GHz		
		WB: (0.810-5.9) GHz		
		WBZ: (2.4-5.9) GHz		

4	10-32 SCREW, MOUNTING, 1.25in	MS24693-C278	-	2
1	O-RING	2-038-N756-75	-	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
 TOLERANCES UNLESS OTHERWISE SPECIFIED:
 DECIMALS ± 1/64 ANGLES ± 1°
 TOLERANCE SW PER AMS Y14.5
 REMOVE ALL BURRS
 BREAK EXTERNAL EDGES .005 TO .010
 SQUARE THREADS PER UNF-5-8879
 DIA'S ON A CONICAL END .0005
 MACHINED SURFACES 12/

DO NOT SCALE DRAWING

ANTCOM CORP. TORRANCE CALIFORNIA

WIFI
 BLADE ANTENNA

DATE: 30/04/2016 TIME: 10:00
 DRAWING NO: 2B24V-P-XT-1
 SCALE: 1/1 SHEET: 1 OF 1

NMO Connector Option is Now Available for Some Antennas