L1 or L1/L2 GPS & Iridium/Inmarsat/Glonass Antennas, P/N: 3D1216P-XS-X-2
Rx Only Thuraya Antenna, P/N: 3DRxTP-XS-X-2,
Rx Only Inmarsat/Iridium Antenna, P/N: 3DRxINP-XS-X-2,
Rx/Tx Thuraya Antenna, P/N: 3DRxTxTP-XS-X-2,
Rx/Tx Inmarsat/Iridium Antenna, P/N: 3DRxTxINP-XS-X-2,
1" Diameter x 4.2" Tall, Swivel, Side Mount (Better L2) Configurations

Antenna Mounts: http://www.antcom.com/documents/catalogs/PeripheralAntennaProducts2.pdf



ANTCOM CORPORATION . 367 Van Ness Way, Suite 602 . Torrance, CA 90501 . Tel: (310) 782-1076 . Fax: (310) 782-1086 . E-mail: antennas@antcom.com . http://www.antcom.com

NOTICE OF PROPRIETARY RIGHTS
THIS DOCUMENT CONTAINS CONFIDENTIAL TECHNICAL DATA INCLUDING TRADE SECRETS PROPRIETARY TO ANTCOM CORP., DISCLOSURE OF THIS DATA TO YOU IS EXPRESSLY CONDITIONED UPON YOUR ASSENT THAT ITS USE IS LIMITED TO USE WITHIN YOUR COMPANY ONLY (AND DOES NOT INCLUDE MANUFACTURE OR PROCESSING USES), ANY OTHER USE IS STRICTLY PROHIBITED WITHOUT PRIOR WRITTEN CONSENT OF ANTCOM CORP.

REVISIONS

ZONE	REV	DESCRIPTION	DATE	APPROVED

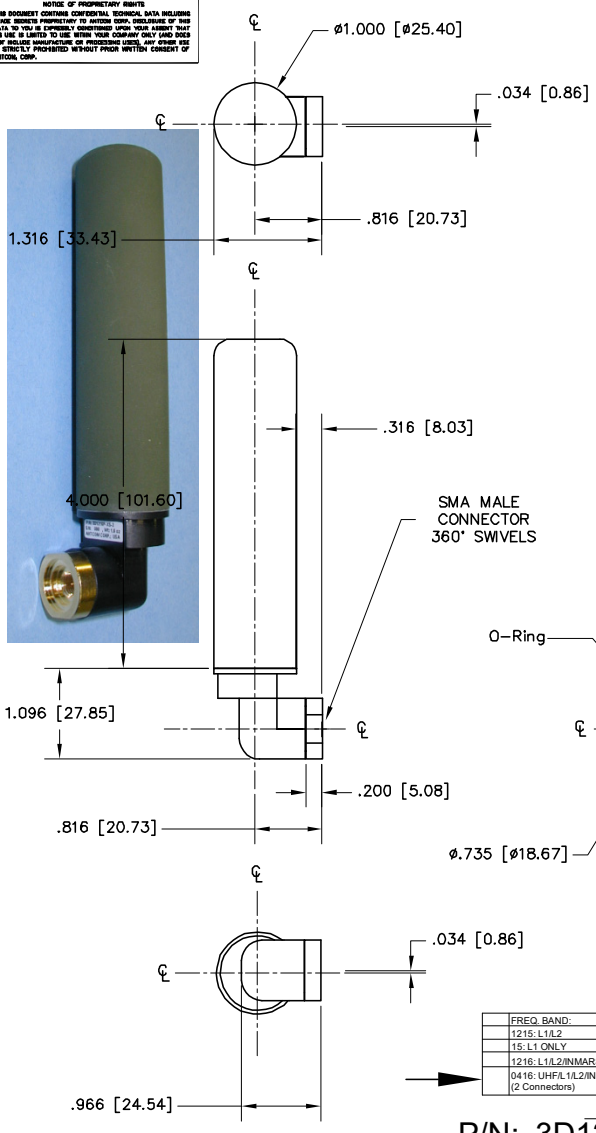

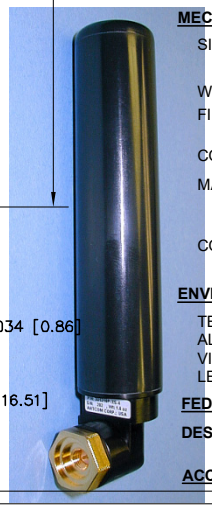

SPECIFICATIONS

ELECTRICAL:

FREQUENCY (MHz):	(1575.42±13)	(1542.50±17.5)	(1642.50±17.5)	(1602-1616)	(1616-1626)	(1227.60±13)
GAIN (dBic)	L1 GPS	Rx INMARSAT	Tx INMARSAT	GLONASS	IRIDIUM	L2 GPS
@ 90° (Zenith):	+2.9	+0.7	-1.6	+0.3	-1.2	0.0
@ 10° Elevation:	-0.4	-2.8	-4.9	-3.1	-4.3	-2.4 to -6.3
@ 20° Elevation:	+0.5	-1.7	-3.5	-1.7	-3.0	-1.8 to -4.8
@ 30° Elevation:	+1.7	-0.7	-2.4	-0.7	-1.9	-1.3 to -3.4
@ 45° Elevation:	+2.4	+0.2	-2.3	-0.1	-1.8	-0.5 to -1.5
@ 70° Elevation:	+2.3	+0.6	-2.1	+0.2	-1.6	0.0 to -0.5
BEAM WIDTH (3dB)	142 Deg.	140 Deg.	146 Deg.	144 Deg.	145 Deg.	(120 to 165) Deg.
AXIAL RATIO (dB)	1 to 3	1 to 4	1 to 3	1 to 4	1 to 3	1 to 5
RADIATION PATTERN:	HEMISPHERICAL					
POLARIZATION:	RHCP					
VSWR:	< 1.5:1					

DC GROUNDING: YES (LIGHTNING PROTECTION)

LNA OPTION:

LNA GAIN: (22.0+/-2.0) dB
LNA NOISE FIGURE: 2.8 dB (Filter loss is Included)
LNA P 1dB Out: +13 dBm
VOLTAGE/CURRENT: (+2.4 TO +5) Volts DC / (15 TO 30) mA
REJECTION: 2 2-POLE FILTERS FOR EACH BAND

MECHANICAL:

SIZE: DIAMETER: 1.00 in.[25.40 mm]
HEIGHT: 4.2 in. [106.68 mm]
WEIGHT: 3.3 oz (93.55 g)
FINISH: SKYDROL RESISTANT POLYURETHANE ENAMEL
BASE IRIDITE PER MIL-C-5441
COLOR: OLIVE DRAB GREEN #34031 PER FED-STD-595B
MATERIAL: 6061-T6 ALUMINUM ALLOY BASE
COMPOSITE RADOME, IMPACT, ABRASION, UV, SOLVENT, SKYDROL RESISTANCE, AND FIRE RETARDANT
CONNECTOR: SMA MALE CONNECTOR, 360° SWIVELS
(OPTION: MCX, SMA, TNC, TNC Bulkhead, N, N Bulkhead, MCX, MMCX, or Cable)

ENVIRONMENTAL:

TEMPERATURE: -67 °F TO +185 °F [-55 °C TO +85 °C]
ALTITUDE: 70,000 ft.
VIBRATION: > 30 G's
LEAKAGE: HERMETICALLY SEALED

FEDERAL & MILITARY SPECIFICATIONS:

DESIGN TO: FAA TSO-C144, DO-160D, D0-228, MIL-C-5541, MIL-E-5400, MIL-I-45208A, MIL-STD-810, AND SAE J1455

ACCEPTANCE TEST PROCEDURE: ATP-GPS-L1L2-100

	FREQ. BAND:	LNA:
	1215: L1/L2	A: WITH LNA
	15: L1 ONLY	P: WITHOUT LNA
	1216: L1/L2/INMARSAT/GLONASS/IRIDIUM	
	0416: UHF/L1/L2/INMARSAT (2 Connectors)	

ITEM NO	QUANTITY REQD	DESCRIPTION	PART NO	SPECIFICATION	MATERIAL	FINISH
1	1			–	–	–

PARTS LIST

P/N: 3D1216X-XS-3

CABLE'S LENGTH:	CONNECTOR:	COLOR:
X: NO CABLE	S: SMA; P: PINS	-1: GLOSS WHITE #17925 PER FED-STD-595B
M: MAG., N: No MAG.	M: MCX; MM: MMCX	-2: LUSTERLESS GRAY #36320 PER FED-STD-595B
#: CABLE LENGTH (IN)	N, NB: N, N-Bulkhead	-3: OLIVE DRAB GREEN #34031 PER FED-STD-595B
R: RIGHT ANGLE CON.	T, TB: TNC, TNC-Bulkhead	-4: LUSTERLESS BLACK #37038 PER FED-STD-595B

1. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS [mm]

NOTES: UNLESS OTHERWISE SPECIFIED:

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS ± 1/64, DECIMALS .XX ±.015, .XXX ±.005, ANGLES ± 1°
TOLERANCE SYM PER ANSI Y14.5
REMOVE ALL BURRS BREAK EXTERNAL EDGES .005 TO .015 FILLETS R .005 TO R .030 SCREW THREADS PER MIL-S-8879 DIA'S ON A COMMON ⌀ .005 M
MACHINED SURFACES 125
DO NOT SCALE DRAWING

DRAWN
CHECKED M. BOAS Aug-15-03
ENGINEER
APPROVED S. HUYNH Aug-15-03
CAD FILE NO

ANTCOM CORP TORRANCE, CALIFORNIA

HANDHELD L1/L2 GPS/INMARSAT/GLONASS/ IRIDIUM ANTENNA

SIZE D | CAGE NO 3CVE1 | DRAWING NO 3D1216X-XS-3-2 | REV –

SCALE 1/1 SHEET 1 OF 1

NMO Connector Option is Now Available for Some Antennas