ANTCOM CORPORATION . 367 Van Ness Way, Suite 602 . Torrance, CA 90501 . Tel: (310) 782-1076 . Fax: (310) 782-1086 . E-mail: antennas@antcom.com . http://www.antcom.com

Other Frequencies, Antenna Sizes, Connectors/Locations, and Mounting Configurations are Available

NMO Connector Option is Now Available for Some Antennas

NOTICE OF PROPRIETARY RIGHTS
THIS DOCUMENT CONTAINS CONFIDENTIAL TECHNICAL DATA INCLUDING TRADE SECRETS PROPRIETARY TO ANTCOM CORP. DISCLOSURE OF THIS DATA TO YOU IS EXPRESSLY CONDITIONED UPON YOUR ASSENT THAT ITS USE IS LIMITED TO USE WITHIN YOUR COMPANY ONLY (AND DOES NOT INCLUDE MANUFACTURE OR PROCESSING USES). ANY OTHER USE IS STRICTLY PROHIBITED WITHOUT PRIOR WRITTEN CONSENT OF ANTCOM CORP.



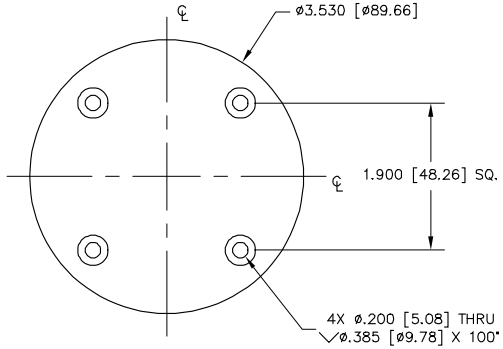

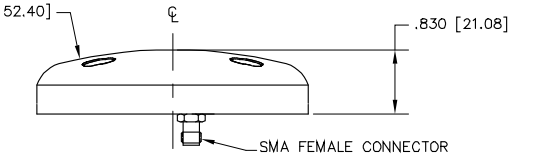

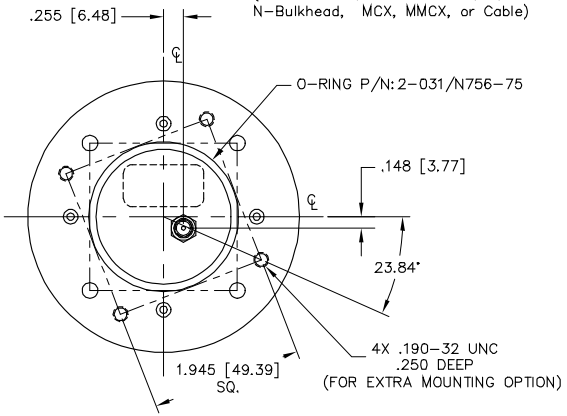

SPECIFICATIONS

ELECTRICAL:

RADIATION PATTERN:	HEMISPHERICAL	
POLARIZATION:	RHCP or LHCP	
VSWR:	< 1.5:1	
GAIN (dB):	4 ft G.P.	Free Space
@ 90° (Zenith):	+4.6	+6.1
@ 10° Elevation (Ave):	-1.1	-2.4
@ 20° Elevation (Ave):	+2.2	+0.3
@ 30° Elevation (Ave):	+2.2	+1.0
@ 45° Elevation (Ave):	+3.4	+2.9
@ 70° Elevation (Ave):	+4.4	+5.3
Beam Width (3dB):	110 °	88 °
AXIAL RATIO @ Zenith:	2.0 dB	
IMPEDANCE:	50 Ohms	
POWER HANDLING:	200 Watt	
DC GROUNDING:	YES (LIGHTNING PROTECTION)	

MECHANICAL:

SIZE: DIAMETER = 3.53 in.[89.66 mm]
HEIGHT = 0.830 in. [21.08 mm]

WEIGHT: 8.5 oz. (241 g)

FINISH: SKYDROL RESISTANT POLYURETHANE ENAMEL
BASE IRIDITE PER MIL-C-5441F

COLOR: GLOSS WHITE #17925 PER FED-STD-595B
LUSTERLESS GRAY #36320 PER FED-STD-595B
OLIVE DRAB GREEN #34031 PER FED-STD-595B
LUSTERLESS BLACK #37038 PER FED-STD-595B

MATERIAL: 6061-T6 ALUMINUM ALLOY BASE
COMPOSITE RADOME, IMPACT, ABRASION, UV, SOLVENT, AND SKYDROL RESISTANCE, FIRE RETARDANT

CONNECTOR: SMA FEMALE
(OPTION: TNC, TNC Bulkhead, N, N Bulkhead, MCX, MMCX, or Cable)

ENVIRONMENTAL:

TEMPERATURE: -67 °F TO +185 °F [-55 °C TO +85 °C]
ALTITUDE: 70,000 ft.
VIBRATION: > 30 G's
LEAKAGE: HERMETICALLY SEAL

FEDERAL & MILITARY SPECIFICATIONS:

DESIGN TO: FAA TSO-C144, DO-160D, D0-228, MIL-C-5541, MIL-E-5400, MIL-I-45208A, MIL-STD-810, AND SAE J1455





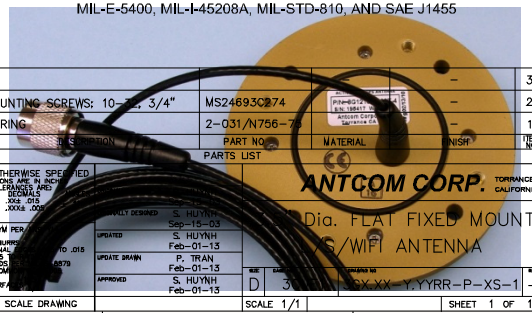

SIZE:	(START - END) FREQ.	POLARIZATION:	LNA:	FILTER:
1: 2" SQ.	1.25 - 1.35 GHz	LL: LHCP	A1: WITH +23 dB LNA	
1.9: 1.9" SQ.	1.35 - 1.45 GHz	RR: RHCP	A2: WITH +43 dB LNA	
2: 2.6" DIA.	2.00 - 2.30 GHz		P: WITHOUT LNA	
3: 3.5" DIA.	2.20 - 2.40 GHz			
4: MINI ARINC	2.40 - 2.50 GHz			
	X.XX - Y.YY GHz			

P/N: 3GX.XX-Y.YYRR-P-XS-1

CABLE'S LENGTH:	CONNECTOR:	COLOR:
X: NO CABLE	S: SMA; P: PINS	-1: GLOSS WHITE #17925 PER FED-STD-595B
M: WITH MAG. MOUNT	M: MCX; MM: MMCX	-2: LUSTERLESS GRAY #36320 PER FED-STD-595B
#: CABLE LENGTH (IN)	N, NB: N, N-Bulkhead	-3: OLIVE DRAB GREEN #34031 PER FED-STD-595B
R: RIGHT ANGLE CON.	T, TB: TNC, TNC- Bulkhead	-4: LUSTERLESS BLACK #37038 PER FED-STD-595B
		-5: TAN #33446 PER FED-STD-595B

NOTES: UNLESS OTHERWISE SPECIFIED:
1. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS [mm]
2. MOUNTING SCREWS ARE SUPPLIED BY ANTCOM CORPORATION

ITEM NO	PARTS LIST		
3	–		
2	MOUNTING SCREWS: 10-32, 3/4"	MS24693C274	–
1	O-RING	2-031/N756-75	–

ANTCOM CORP. TORRANCE CALIFORNIA

Dia. FLAT FIXED MOUNT
S/WIFI ANTENNA

DO NOT SCALE DRAWING | SCALE 1/1 | SHEET 1 OF 1