



ISO 9001:2008/FAA Approved Facility

Active Rx L, LS, S, CS and LSC-Band Antenna


(1.25-1.35) GHz, P/N: 3RG1.25-1.35VV-A-XS-1; (1.35-1.45) GHz, P/N: 3RG1.35-1.45VV-A-XS-1
 (1.60-2.50) GHz, P/N: 3RG1.60-2.50VV-A-XS-1; (1.80-2.30) GHz, P/N: 3RG1.80-2.30VV-A-XS-1
 (2.00-2.30) GHz, P/N: 3RG2.00-2.30VV-A-XS-1; (2.20-2.40) GHz, P/N: 3RG2.20-2.40VV-A-XS-1
 (2.35-2.45) GHz, P/N: 3RG2.35-2.45VV-A-XS-1; (2.40-2.50) GHz, P/N: 3RG2.40-2.50VV-A-XS-1

Other Frequency Bands, LNA, Connectors and Colors are Also Available

Antenna Mounts/Adapters: <http://www.antcom.com/documents/catalogs/PeripheralAntennaProducts2.pdf>



ANTCOM CORPORATION . 367 Van Ness Way, Suite 602 . Torrance, CA 90501, USA . Tel: (310) 782-1076 . Fax: (310) 782-1086 . E-mail: antennas@antcom.com . <http://www.antcom.com>

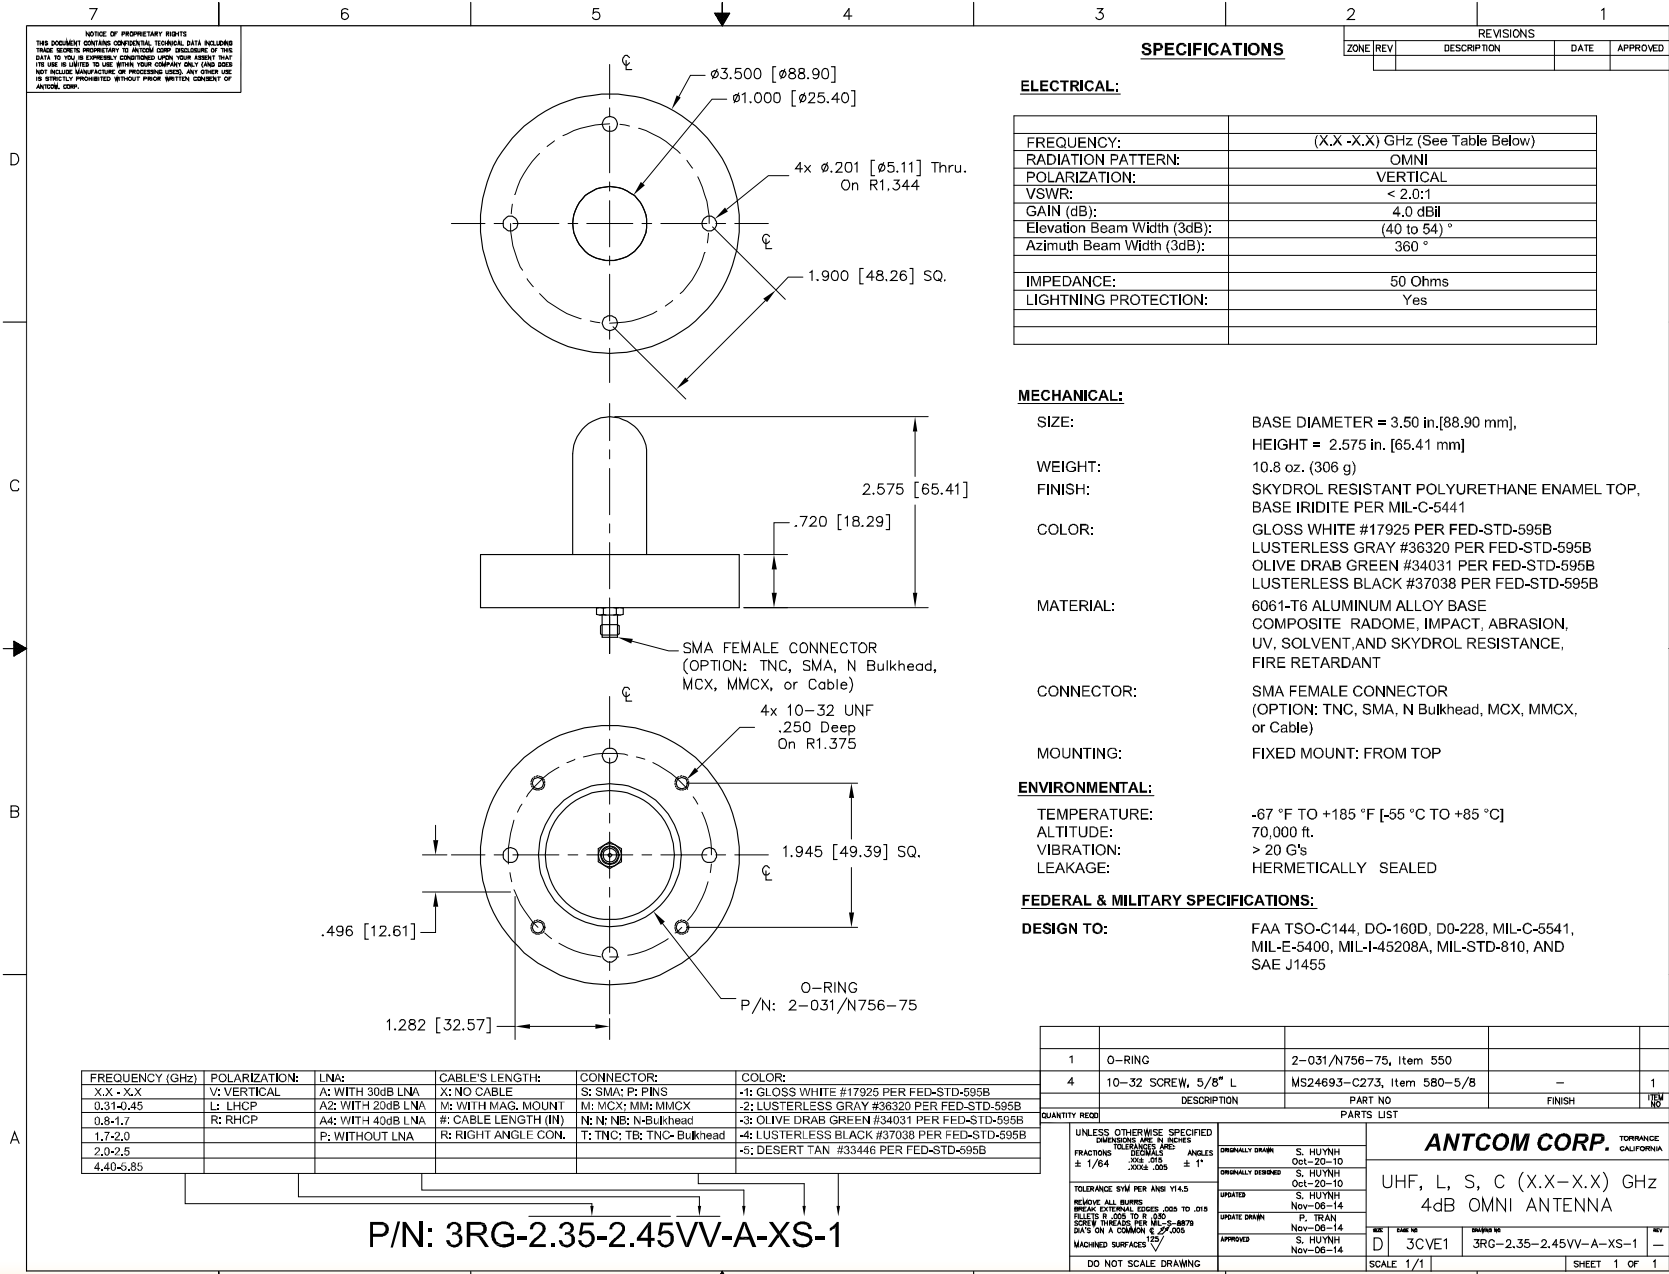

NMO Connector Option is Now Available for Some Antennas