

NOTICE OF PROPRIETARY RIGHTS
 THIS DOCUMENT CONTAINS CONFIDENTIAL TECHNICAL DATA INCLUDING TRADE SECRETS PROPRIETARY TO ANTCOM, CORP. DISCLOSURE OF THIS DATA TO YOU IS EXPRESSLY CONDITIONED UPON YOUR ASSENT THAT ITS USE IS LIMITED TO USE WITHIN YOUR COMPANY ONLY (AND DOES NOT INCLUDE MANUFACTURE OR PROCESSING USES). ANY OTHER USE IS STRICTLY PROHIBITED WITHOUT PRIOR WRITTEN CONSENT OF ANTCOM, CORP.

REVISIONS							
ZONE	REV	DESCRIPTION	DATE	REQ'ED	REVISED	APPROVED	APPROVED
-		REVISED FROM 5G FOR 42G GASKET	06/26/12	K.L	PHILTRAN	K.L	S.H

**Neoprene EPDM
 (Durafoam DK4215-EU Black,
 1.5mm Thick)**

<http://www.rubberplastics.com/>
 Phone (732) 229-3444
 Fax (732) 229-0711

DATA SHEET

**EPDM
 (Ethylene Propylene Diene Terpolymer)**

Color:

Specifications: ASTM D-1056-00
 ASTM D-1056-67(1)
 SAE J18-02
 GM 6086M(3)
 GMN11106(3)

25% Compression Deflection (PSI)

Shore 00 Durometer (Approximate)

Density (Approximate p.c.f.)

Water Absorption By Weight

Temperature Range

Weather Resistance: UV
 Ozone



Accelerated Linear Shrinkage (Typical)

Tensile Strength (Typical)

Elongation (Typical)

Flammability: FM VSS No. 302

UL Recognized Component Gasket Materials:
 (Call Customer Service for Details)

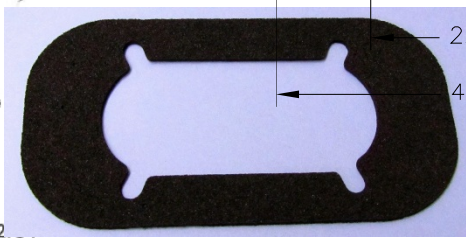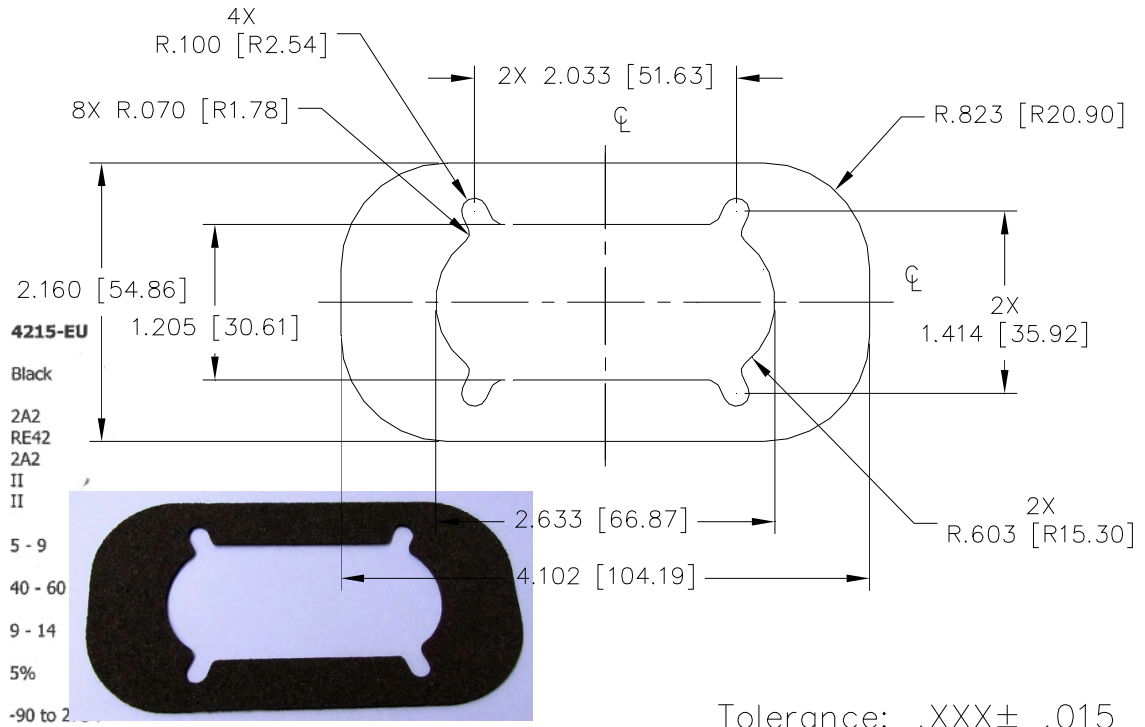

1	GASKET	EPDM 4215-EU (100% EPDM Black, .0625 in. Thick)	1
QTY REQD	DESCRIPTION	MATERIAL	ITEM NO
PARTS LIST			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		ORIGINALLY DRAWN S. HUYNH Nov-29-05	ANTCOM CORP. TORRANCE CALIFORNIA
FRACTIONS TOLERANCES ARE: ANGLES		ORIGINALLY DESIGNED S. HUYNH Nov-29-05	
± 1/64 .XX± .015 ± 1°		UPDATE DRAWN	42G EPDM GASKET
TOLERANCE SYM PER ANSI Y14.5		APPROVED S. HUYNH Nov-29-05	
REMOVE ALL BURRS BREAK EXTERNAL EDGES .005 TO .015 FILLETS R .005 TO R .030 SCREW THREADS PER MIL-S-8879 DIA'S ON A COMMON ϕ \pm .005		CAD FILE NO	SIZE B CAGE NO 3CVE1 DRAWING NO 42G-Gasket-1 REV -
MACHINED SURFACES 125/		DO NOT SCALE DRAWING	SCALE 1/1 SHEET 1 OF 1