DAGR's Remote Antenna 1 (RA-1), Active L1/L2 GPS Antenna

P/N: 4G1215A-XMNS-3-D (-3: Green, -1: White, -5: Tan; -4: Black)

(2.973" x 2.161") Side Connector Configuration



ISO 9001:2008/FAA Approved Facility Antenna Mounts: http://www.antcom.com/documents/catalogs/PeripheralAntennaProducts2.pdf

ANTCOM CORPORATION . 367 Van Ness Way, #602 . Torrance, CA 90501 . Tel: (310) 782-1076 . Fax: (310) 782-1086 . E-mail: antennas@antcom.com . http://www.antcom.com

NOTICE OF PROPRIETARY RIGHTS
THIS DOCUMENT CONTAINS CONFIDENTIAL TECHNICAL DATA INCLUDING TRADE SECRETS PROPRIETARY TO ANTCOM CORP. DISCLOSURE OF THIS DATA TO YOU IS EXPRESSLY CONDITIONED UPON YOUR AGREEMENT THAT ITS USE IS LIMITED TO USE WITHIN YOUR COMPANY ONLY (AND DOES NOT INCLUDE MANUFACTURE OR PROCESSING USES). ANY OTHER USE IS STRICTLY PROHIBITED WITHOUT PRIOR WRITTEN CONSENT OF 3D MARKETING

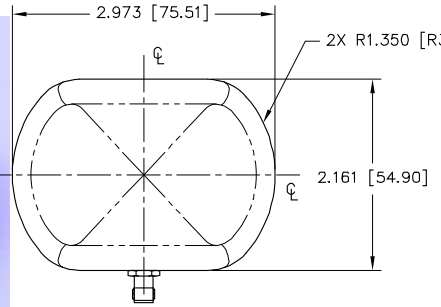

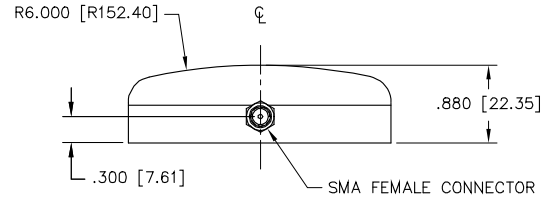

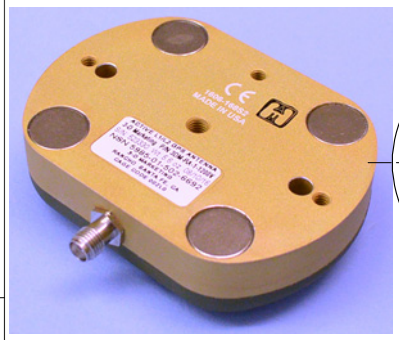

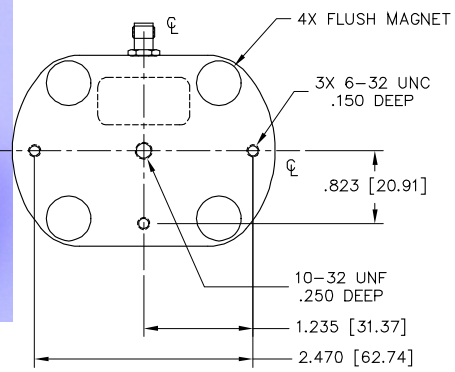

SPECIFICATIONS

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	B	SMALLER FOOT PRINT	06/20/16	S.H.

ELECTRICAL:

FREQUENCY:	L1: (1575.42 ±15) MHz			L2: (1227.60 ±15 MHz		
RADIATION PATTERN:	HEMISPHERICAL					
POLARIZATION:	RHCP			RHCP		
VSWR:	< 2.0:1			< 2.0:1		
IMPEDANCE:	50 ohms			50 ohms		
ANTENNA GAIN (dBic):	Free Space	3 in G.P.	4 ft G.P.	Free Space	3 in G.P.	4 ft G.P.
@ 90 ° (ZENITH):	+ 5.0	+ 4.7	+ 3.1	+ 0.7	+ 3.3	+ 4.5
@ 10 ° Elevation:	- 2.1	- 1.8	- 1.9	- 5.8	- 3.8	- 3.5
@ 20 ° Elevation:	- 0.6	- 0.3	+ 0.6	- 4.3	- 2.0	- 0.8
@ 30 ° Elevation:	+ 0.9	+ 1.4	+ 1.7	- 3.4	- 0.5	+ 1.4
@ 60 - 90 ° Elevation:	> 4.0	> 3.9	> 2.4	> - 0.9	> 2.7	> 2.2
BEAM WIDTH (3dB):	103 Deg.	114 Deg.	143 Deg.	94 Deg.	106 Deg.	74 Deg.
AXIAL RATIO:	2 dB			2 dB		
LIGHTNING PROTECTION:	DC GROUNDING					
LNA GAIN:	33 dB			35 dB		
LNA NOISE FIGURE:	3.0 dB			3.0 dB		
LNA P1dB Out:	+13 dBm			+13 dBm		
LNA DC POWER:	(2.5 to 24)Vdc @ (30 to 50)mA					
REJECTION @ (-50/+50) MHz	-41 dB / -59 dB			-40 dB / -40 dB		
@ (-100/+100) MHz	< -65 dB			< -65 dB		
POWER HANDLING:	1 Watt CW					

MECHANICAL:

SIZE:	WIDTH: 2.161 in. [54.90 mm], LENGTH 2.973 in. [75.51 mm], HEIGHT: 0.880 in. [22.34 mm]
WEIGHT:	6.2 oz. (175.7 g)
FINISH:	SKYDROL RESISTANT POLYURETHANE ENAMEL BASE IRIDITE PER MIL-C-5541F
MATERIAL:	6061-T6 ALUMINUM ALLOY BASE COMPOSITE RADOME, IMPACT, ABRASION, UV, SOLVENT, SKYDROL RESISTANCE, AND FIRE RETARDANT
CONNECTOR:	SMA FEMALE

ENVIRONMENTAL:

TEMPERATURE:	OPERATING: -67 °F TO +185 °F [-55 °C TO +85 °C] STORAGE: -71 °F TO +185 °F [-57 °C TO +85 °C]
ALTITUDE:	70,000 ft.
VIBRATION:	> 30 G's
LEAKAGE:	HERMETICALLY SEALED

FEDERAL & MILITARY SPECIFICATIONS:

DESIGN TO: FAA TSO-C144, DO-160D, D0-228, MIL-C-5541, MIL-E-5400, MIL-I-45208A, MIL-STD-810, AND SAE J1455

ACCEPTANCE TEST PROCEDURE: ATP-GPS-L1L2-100

P/N: 4G1215A-XMNS-3-D

CONNECTOR:	COLOR:
S: SMA; P: PINS	-1: GLOSS WHITE #17925 PER FED-STD-595B
M: MCX; MM: MMCX	-2: LUSTERLESS GRAY #36320 PER FED-STD-595B
N, NB: N, N-Bulkhead	-3: CAMO GREEN #34094 PER FED-STD-595B
T, TB: TNC, TNC-Bulkhead	-4: LUSTERLESS BLACK #37038 PER FED-STD-595B
	-5: DESERT TAN #33446 PER FED-STD-595B

1. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS [mm]

NOTES: UNLESS OTHERWISE SPECIFIED:

ITEM NO	QUANTITY REQD	DESCRIPTION	PART NO.	MATERIAL	FINISH
1	–	–	–	–	–

PARTS LIST

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. TOLERANCES: FRACTIONS ± 1/64, DECIMALS .XX ±.010, .XXX ±.005, ANGLES ± 1°. TOLERANCE SYM PER ANSI Y14.5. REMOVE ALL BURRS. BREAK EXTERNAL EDGES .005 TO .015. FILLETS R .005 TO R .030. SCREW THREADS PER MIL-S-8879. DIA'S ON A COMMON Ø .005. MACHINED SURFACES 125/. DO NOT SCALE DRAWING.

ANTCOM CORP. TORRANCE CALIFORNIA

OUTLINE DRAWING
L1/L2 ACTIVE, OR PASSIVE
GPS ANTENNA

ORIGINALLY DRAWN	S. HUYNH June-08-12
ORIGINALLY DESIGNED	S. HUYNH June-08-12
UPDATED	S. HUYNH June-20-16
UPDATE DRAWN	P. TRAN June-20-16
APPROVED	S. HUYNH June-20-16

SIZE D | CAGE NO 002LO | DRAWING NO 4G1215A-XMNS-3-D | REV B

SCALE 1/1 | SHEET 1 OF 1