



ISO 9001:2008/FAA Approved Facility

Antenna Mounts/Adapters: <http://www.antcom.com/documents/catalogs/PeripheralAntennaProducts2.pdf>

UHF/L/S-Band Antenna


P/N: 5W-0.70-2.20P-XTM-4-GN-3in Rev E

3in GN and 4.5in Tall x 0.5" Dia. Rod Goose Neck Configuration



ANTCOM CORPORATION . 367 Van Ness Way, Suite 602 . Torrance, CA 90501, USA . Tel: (310) 782-1076 . Fax: (310) 782-1086 . E-mail: antennas@antcom.com . <http://www.antcom.com>

NOTICE OF PROPRIETARY RIGHTS
THIS DOCUMENT CONTAINS CONFIDENTIAL TECHNICAL DATA INCLUDING TRADE SECRETS PROPRIETARY TO ANTCOM CORP. DISCLOSURE OF THIS DATA TO YOU IS EXPRESSLY CONDITIONED UPON YOUR ASSENT THAT ITS USE IS LIMITED TO USE WITHIN YOUR COMPANY ONLY (AND DOES NOT INCLUDE MANUFACTURE OR PROCESSING USES). ANY OTHER USE IS STRICTLY PROHIBITED WITHOUT PRIOR WRITTEN CONSENT OF ANTCOM CORP.

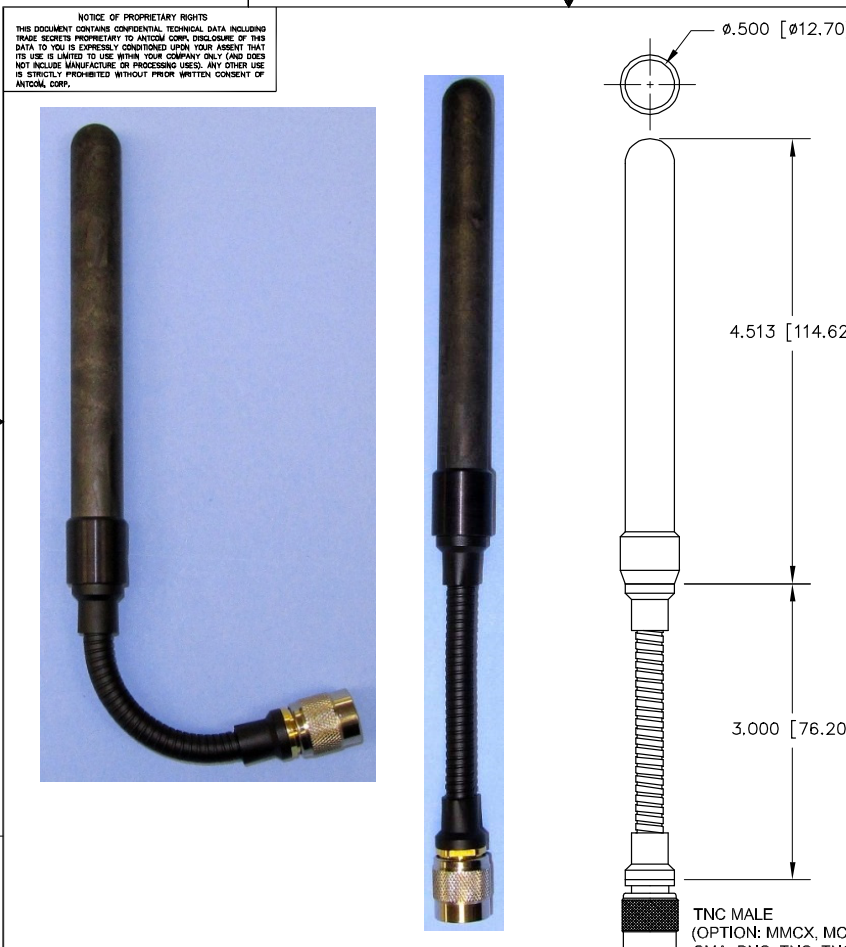

$\phi .500$ [12.70]
 4.513 [114.62]
 3.000 [76.20]

TNC MALE
(OPTION: MMCX, MCX, SMP, SSMC
SMA, BNC, TNC, TNC Bulkhead, N)

SPECIFICATIONS

ELECTRICAL:

FREQUENCY (GHz):	UHF/L/S-BAND (0.70-2.20)
PATTERN:	OMNIDIRECTIONAL
POLARIZATION:	VERTICAL
ANTENNA GAIN:	1/4 Wave
VSWR:	(2 -3):1
OUTPUT IMPEDANCE:	50 Ω
POWER HANDLING:	>50 watts (Without LNA)
LNA OPTION:	GAIN: 20 dB, NF: 4.1 dB, OP1dB: +18dB, OIP3: +33dB DC: (5 to 24) Volt @ <70mA

MECHANICAL:

SIZE: DIAMETER: TOP= 0.500 in [12.70 mm]
HEIGHT: 4.513 in [114 mm] (Without Goose Neck)

WEIGHT: 1.5 oz. (42 g)

FINISH: SKYDROL RESISTANT POLYURETHANE ENAMEL, BLACK ANODIZE PER MIL-A-8625F

COLOR: LUSTERLESS GRAY #36320 PER FED-STD-595B
GLOSS WHITE #17925 PER FED-STD-595B
CAMO GREEN #34094 PER FED-STD-595B
LUSTERLESS BLACK #37038 PER FED-STD-595B

MATERIAL: 6061-T6 ALUMINUM ALLOY BASE
THERMOSET PLASTIC RADOME, UV, ABRASION AND SKYDROL RESISTANCE

CONNECTOR: TNC MALE
(OPTION: SMA, N, BNC AND OTHERS)

ENVIRONMENTAL:

TEMPERATURE: -67°F TO +185°F [-55°C TO +85°C]
ALTITUDE: 70,000 ft.
VIBRATION: >10 G's
LEAKAGE: HERMETICALLY SEALED

FEDERAL & MILITARY SPECIFICATIONS:

DESIGN TO: DO-160D, MIL-C-5541, MIL-E-5400, MIL-I-45208A, AND MIL-STD-810E

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
E		with DIRT COVER	FEB-01-11	S.H

CONFIGURATION:	FREQUENCY:	LNA:	CABLE'S LENGTH:	CONNECTORS:	COLOR:
3P: WITH 1.75IN DIA. FLANGE & WITH-OUT Flange	0.31-4.45C (310-400) MHz	A: WITH +20 dB LNA	X: NO CABLE	S: SMA FEMALE	-1: GLOSS WHITE #17925 PER FED-STD-595B
	0.35-0.40: (350-400) MHz	P: WITHOUT LNA	M: WITH MAG. MOUNT	SM: SMA MALE	-2: LUSTERLESS GRAY #36320 PER FED-STD-595B
	0.40-0.45: (400-450) MHz		R: CABLE LENGTH (IN)	T: TNC FEMALE	-3: CAMO GREEN #34094 PER FED-STD-595B
	0.81-0.95: (810-960) MHz		R: RIGHT ANGLE CON.	TM: TNC MALE	-4: Natural Back Color from Ultem 2200 Black (20% Glass)
	0.85-1.90: (850-1900) MHz			N: N FEMALE; B: BNC FEMALE	-5: DESERT TAN #33446 PER FED-STD-595B
	1.35-1.54: (1332-1540) MHz			NN: N MALE; BN: BNC MALE	
	1.70-2.20: (1700-2200) MHz				
	1.61-2.50: (1610-2500) MHz				
	2.40-2.50: (2400-2500) MHz				
	4.40-5.85: (4400-5850) MHz				
	X.XX - Y.YY: (X.XX - Y.YY) GHz				

1	DESCRIPTION	PART NO	SPECIFICATION	MATERIAL	FINISH	1
QUANTITY REQD	PARTS LIST					ITEM NO
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES						
TOLERANCES ARE:						
FRACTIONS	.XX ± .015		ANGLES		± 1°	
± 1/64	.XXX ± .005					
TOLERANCE SYM PER ANSI Y14.5						
REMOVE ALL BURRS						
BREAK EXTERNAL EDGES .005 TO .016						
FILLET R .005 TO R .030						
SCREW THREADS PER MIL-S-8879						
DIMS ON A COMMON & 2P.005						
MACHINED SURFACES $\sqrt{\text{125}}$						
DO NOT SCALE DRAWING						

P/N: 5W-0.70-2.20P-XTM-4-GN-3in

DATE	30VE1	REV	E
SCALE	1/1	SHEET	1 OF 1

ANTCOM CORP. TORRANCE CALIFORNIA

UHF/L/S-BAND
OMNI ANTENNA

DATE	30VE1	REV	E
SCALE	1/1	SHEET	1 OF 1

NMO Connector Option is Now Available for Some Antennas