



FAA Approved Facility

New High Gain Array Antenna

P/N: 5X18A-TL-P-XT-1 (Thuraya); P/N: 5X18A-INR-P-XT-1 (Inmarsat/Iridium)

P/N: 5X18A-1.6-1.9V-P-XT-1 (1.6 - 1.9 GHz); P/N: 5X18A-2.2-2.3V-P-XT-1 (2.2 - 2.3 GHz)

P/N: 5X18A-2.2-2.4V-P-XT-1 (2.2 - 2.4 GHz); P/N: 5X18A-2.2-2.5V-P-XT-1 (2.2 - 2.5 GHz)

P/N: 5X18A-2.4-2.5V-P-XT-1 (2.4 - 2.5 GHz); P/N: 5X18A-LSV-P-XT-1 ((1.625 - 1.85)/(2.2 - 2.4) GHz)

Antenna Mounts: <http://www.antcom.com/documents/catalogs/PeripheralAntennaProducts2.pdf>



ANTCOM CORPORATION . 367 Van Ness Way, Suite 602 . Torrance, CA 90501 . Tel: (310) 782-1076 . Fax: (310) 782-1086 . E-mail: antennas@antcom.com . <http://www.antcom.com>

NOTICE OF PROPRIETARY RIGHTS
THIS DOCUMENT CONTAINS CONFIDENTIAL, TECHNICAL DATA INCLUDING TRADE SECRETS, PROPRIETARY TO ANTCOM CORP. DISCLOSURE OF THIS DATA TO ANY OTHER PARTY IS EXPRESSLY PROHIBITED. YOUR RIGHTS AND THE USE IS LIMITED TO USE WITHIN YOUR COMPANY ONLY AND DOES NOT INCLUDE MANUFACTURE OR REPRODUCTION. ANY OTHER USE IS STRICTLY PROHIBITED WITHOUT PRIOR WRITTEN CONSENT OF ANTCOM CORP.

SPECIFICATIONS

REVISIONS			
ZONE	REV	DESCRIPTION	DATE


ELECTRICAL:
 FREQUENCY: (X.XX - X.XX) GHz - See Below Table for P/N
 PATTERN: DIRECTIONAL
 POLARIZATION: RHCP, LHCP, or LINEAR - See Below Table for P/N
 ANTENNA GAIN: 12 dB
 BEAM WIDTH: EL: 70 Deg.
 AZ: 30 Deg.
 VSWR: 2.0:1
 OUTPUT IMPEDANCE: 50 ohms
 POWER HANDLING: 100 watts
 DC GROUNDING: YES

LNA OPTION (For Rx Only):
 LNA GAIN: 33 dB (P1dBout = +13 dBm)
 LNA NOISE FIGURE: 2.2 dB
 LNA VOLTAGE: (+2.5 to +24) Volts DC
 LNA DRAWING CURRENT: < 30 mA

MECHANICAL:
 SIZE: 4.7 in x 18.8 in x 0.56 in
 WEIGHT: 10.8 oz. (306 g)
 FINISH: SKYDROL RESISTANT POLYURETHANE ENAMEL, AND BLACK ANODIZED
 MATERIAL: 6061-T6 ALUMINUM ALLOY BASE COMPOSITE RADOME, IMPACT, ABRASION, UV, SOLVENT, AND SKYDROL RESISTANCE, FIRE RETARDANT
 CONNECTOR: TNC FEMALE (OPTION: SMA, QMA, SMB, N)

ENVIRONMENTAL:
 TEMPERATURE: -67 °F TO +185 °F [-55 °C TO +85 °C]
 ALTITUDE: 30,000 ft.
 VIBRATION: > 20 G's
 LEAKAGE: HERMETICALLY SEALED

FEDERAL & MILITARY SPECIFICATIONS:
DESIGN TO: FAA TSO-C144, DO-160D, D0-228, MIL-C-5541, MIL-E-5400, MIL-I-45208A, MIL-STD-810, AND SAE J1455

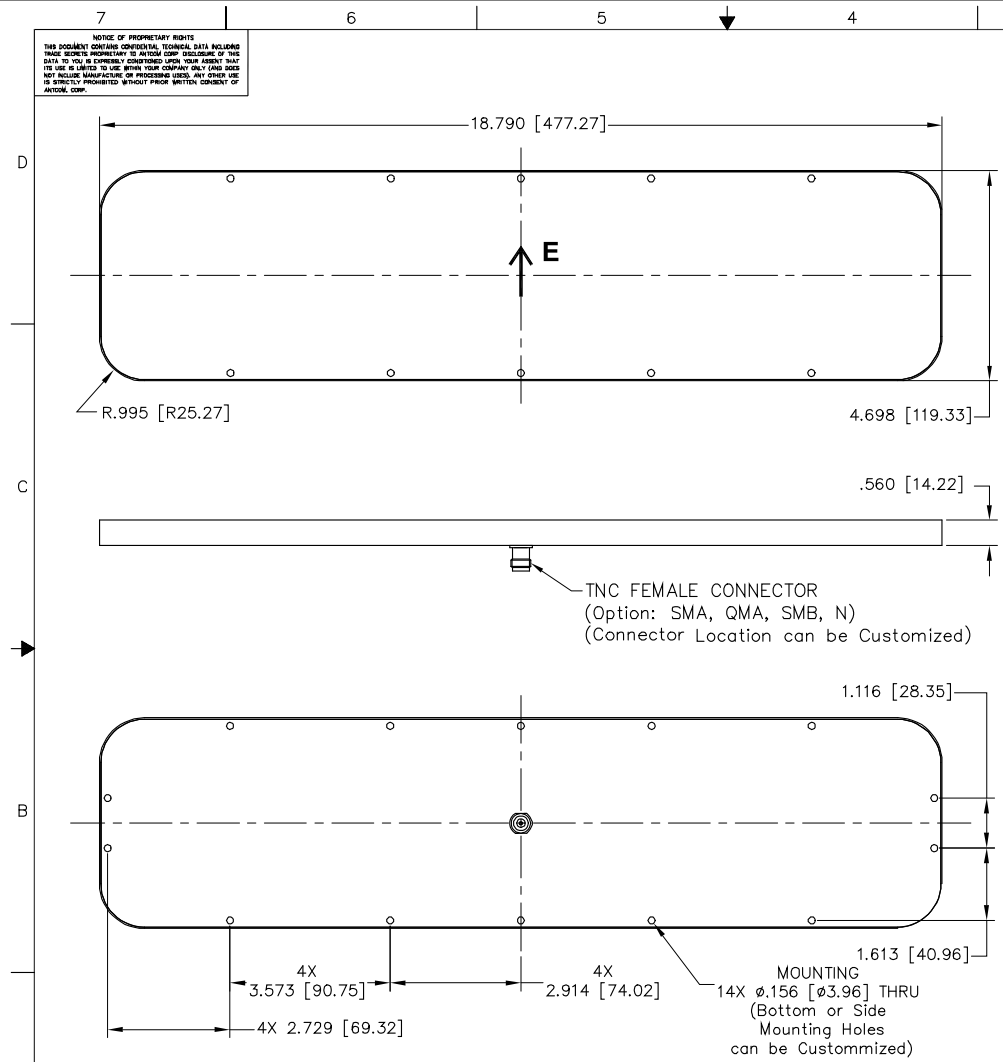

FREQUENCY BAND:	S/C-BAND POL.	LNA:	CONNECTOR:	COLOR:
T: Rx/Tx Thuraya	V: VERTICAL	A: ACTIVE	S: SMA	-1: GLOSS WHITE #17925 PER FED-STD-595B
IN: Rx/Tx Inmarsat/Iridium	R: RHCP	P: PASSIVE	Q: QMA	-2: LUSTERLESS GRAY #36320 PER FED-STD-595B
1.6-1.9: (1.6 - 1.9) GHz	L: LHVP		SMB: SMB	-3: OLIVE DRAB GREEN #34031 PER FED-STD-595B
2.2-2.3: (2.2 - 2.3) GHz			T: TNC	-4: LUSTERLESS BLACK #37038 PER FED-STD-595B
2.2-2.4: (2.2 - 2.4) GHz			N: N	-5: TAN #33446 PER FED-STD-595B
2.4-2.5: (2.4 - 2.5) GHz				
2.2-2.5: (2.2 - 2.5) GHz				
LS: (1.625 - 1.85)/(2.2 - 2.4) GHz				
XX-Y:Y:(X,XX - Y,YY) GHz				

5X18A-X.X-Y.YV-P-XT-5

QUANTITY	DESCRIPTION	PART NO	FINISH	REV
1				3
1				2
1				1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRACTIONS TOLERANCES DECIMALS ANGLES	ORIGINALLY DESIGNED	DATE
± 1/64 .002 .010 ± .1°	S. HUYNH	Mar-12-12
	S. HUYNH	Mar-12-12
	S. HUYNH	Mar-10-14
	F. TRAN	Mar-10-14
	S. HUYNH	Mar-10-14

ANTCOM CORP.	TORRANCE, CALIFORNIA
Rx/Tx- Thuraya or Inmarsat/Iridium Antenna	
REV	DATE
D	3CVE1
SCALE 1/1	
SHEET 1 OF 1	

NMO Connector is Now Available for Some Antennas