

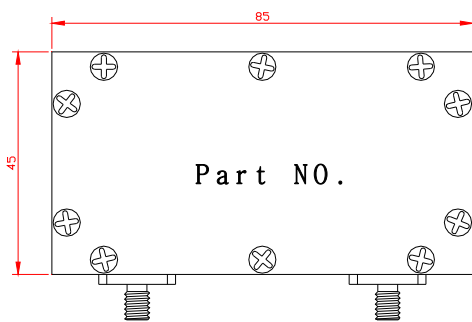




Parameter	Unit	Specification
Center Frequency	M Hz	725
3dB Bandwidth	M Hz	704~746
IL (max.)	dB	3.0
Return Loss (min.)	dB	15
Attenuation (min.)	dB	30 @ 699 MHz
Attenuation (min.)	dB	65 @ 695 MHz
Attenuation (min.)	dB	30 @ 751 MHz
Attenuation (min.)	dB	65 @ 756 MHz
In / Out Impedance	Ohm	50
Operating Temp.	°C	-30 ~80

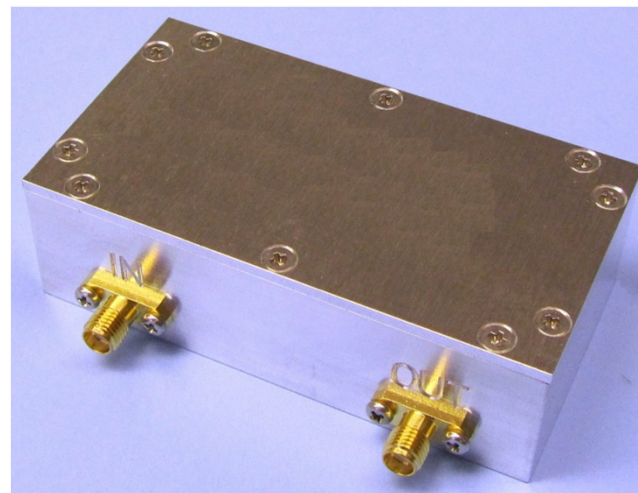

Top Side

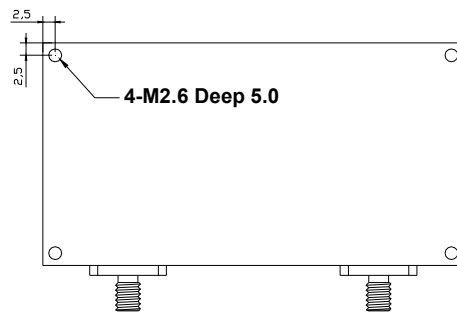

Bottom Side

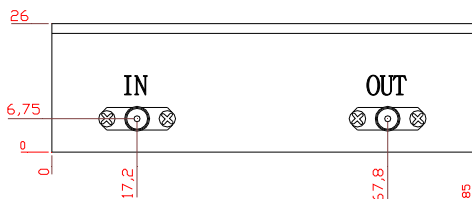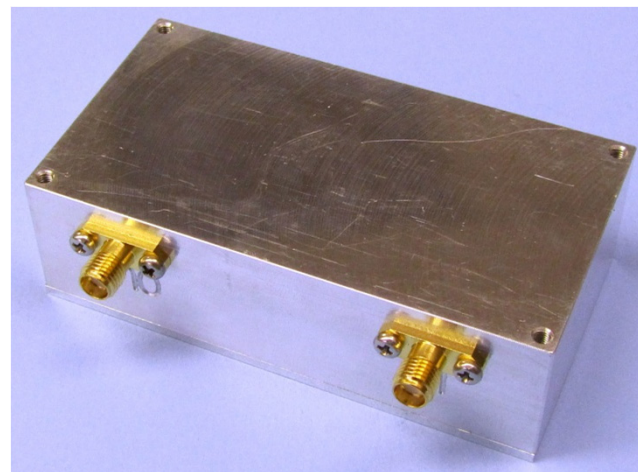

Front Side



Right Side

Unit : mm
Tolerance unless
otherwise specified : ±0.2