



FAA Approved Facility

New High Gain Array Antenna

P/N: 9X18A-TL-P-XT-1 (Thuraya); P/N: 9X18A-INR-P-XT-1 (Inmarsat/Iridium)
 P/N: 9X18A-1.6-1.9V-P-XT-1 (1.6 - 1.9 GHz); P/N: 9X18A-2.2-2.3V-P-XT-1 (2.2 - 2.3 GHz)
 P/N: 9X18A-2.2-2.4V-P-XT-1 (2.2 - 2.4 GHz); P/N: 9X18A-2.2-2.5V-P-XT-1 (2.2 - 2.5 GHz)
 P/N: 9X18A-2.4-2.5V-P-XT-1 (2.4 - 2.5 GHz); P/N: 9X18A-LSV-P-XT-1 ((1.625 - 1.85)/(2.2 - 2.4) GHz)
 Antenna Mounts/Adapters: <http://www.antcom.com/documents/catalogs/PeripheralAntennaProducts2.pdf>




ANTCOM CORPORATION . 367 Van Ness Way, Suite 602 . Torrance, CA 90501 . Tel: (310) 782-1076 . Fax: (310) 782-1086 . E-mail: antennas@antcom.com . <http://www.antcom.com>

NOTICE OF PROPRIETARY RIGHTS
 THIS DOCUMENT CONTAINS CONFIDENTIAL, TECHNICAL DATA INCLUDING TRADE SECRETS PROPRIETARY TO ANTCOM CORP. DISCLOSURE OF THIS DATA TO ANY OTHER PARTY IS EXPRESSLY PROHIBITED. YOUR USE OF THIS DATA IS LIMITED TO THE INTENT OF THIS COMPANY ONLY AND DOES NOT INCLUDE MANUFACTURE OR REPRODUCTION. ANY OTHER USE IS EXPRESSLY PROHIBITED WITHOUT PRIOR WRITTEN CONSENT OF ANTCOM CORP.

SPECIFICATIONS

REVISIONS		DATE	APPROVED
ZONE	REV	DESCRIPTION	

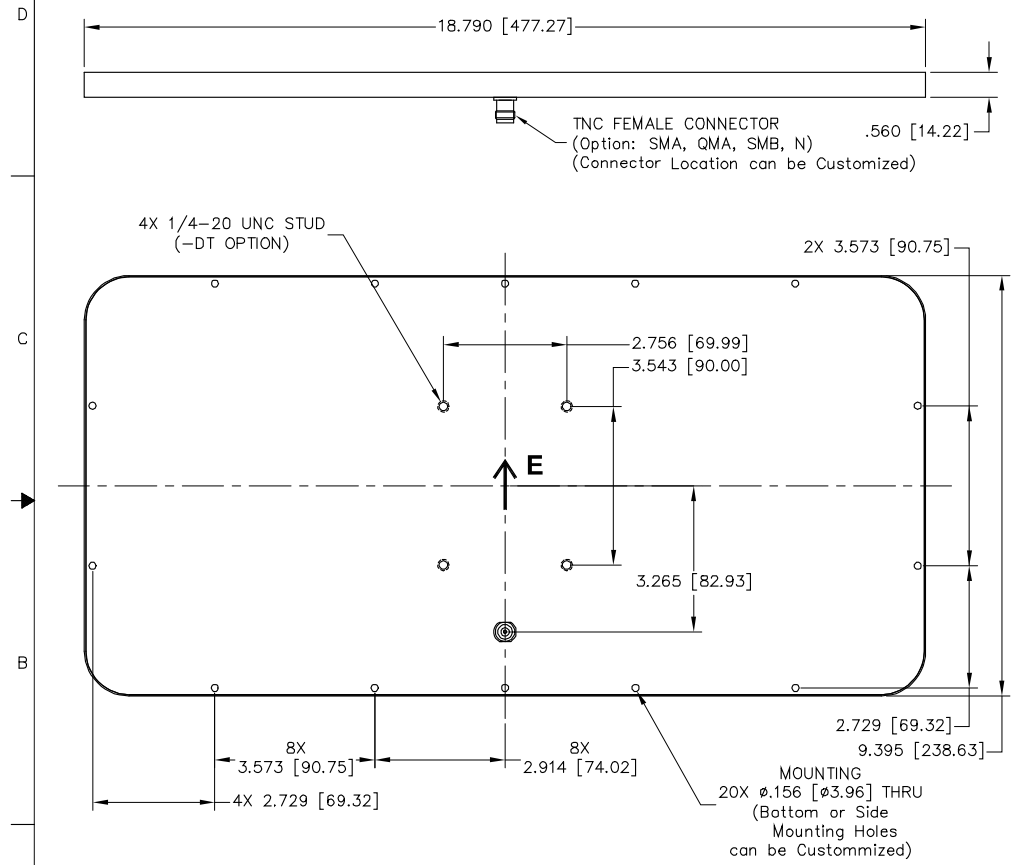

ELECTRICAL:

FREQUENCY: (X.XX - X.XX) GHz - See Below Table for P/N
 DIRECTIONAL PATTERN: RHCP, LHCP, or LINEAR - See Below Table for P/N
 ANTENNA GAIN: 15 dB
 BEAM WIDTH: EL: 40 Deg. AZ: 20 Deg.
 VSWR: 2.0:1
 OUTPUT IMPEDANCE: 50 ohms
 POWER HANDLING: 100 watts
 DC GROUNDING: YES

LNA OPTION (For Rx Only):

LNA GAIN: 33 dB (P1dBout = +13 dBm)
 LNA NOISE FIGURE: 2.2 dB
 LNA VOLTAGE: (+2.5 to +24) Volts DC
 LNA DRAWING CURRENT: < 30 mA

MECHANICAL:

SIZE: 9.39 in x 18.8 in x 0.56 in
 WEIGHT: 1.35 lbs (612 g)
 FINISH: SKYDROL RESISTANT POLYURETHANE ENAMEL, AND BLACK ANODIZED
 MATERIAL: 6061-T6 ALUMINUM ALLOY BASE COMPOSITE RADOME, IMPACT, ABRASION, UV, SOLVENT AND SKYDROL RESISTANCE, FIRE RETARDANT
 CONNECTOR: TNC FEMALE (OPTION: SMA, QMA, SMB, N)

ENVIRONMENTAL:

TEMPERATURE: -67 °F TO +185 °F [-55 °C TO +85 °C]
 ALTITUDE: 30,000 ft.
 VIBRATION: > 20 G's
 LEAKAGE: HERMETICALLY SEALED

FEDERAL & MILITARY SPECIFICATIONS:

DESIGN TO: FAA TSO-C144, DO-160D, D0-228, MIL-C-5541, MIL-E-5400, MIL-I-45208A, MIL-STD-810, AND SAE J1455

FREQUENCY BAND:	S/C-BAND POL.	LNA:	CONNECTOR:	COLOR:
T: Rx/Tx Thuraya	V: VERTICAL	A: ACTIVE	S: SMA	-1: GLOSS WHITE #17925 PER FED-STD-595B
IN: Rx/Tx Inmarsat/Iridium	R: RHCP	P: PASSIVE	Q: QMA	-2: LUSTERLESS GRAY #36320 PER FED-STD-595B
1.6-1.9: (1.6 - 1.9) GHz	L: LHVP		SMB: SMB	-3: OLIVE DRAB GREEN #34031 PER FED-STD-595B
2.2-2.3: (2.2 - 2.3) GHz			T: TNC	-4: LUSTERLESS BLACK #37038 PER FED-STD-595B
2.2-2.4: (2.2 - 2.4) GHz			N: N	-5: TAN #33446 PER FED-STD-595B
2.4-2.5: (2.4 - 2.5) GHz				
2.2-2.5: (2.2 - 2.5) GHz				
LS: (1.625 - 1.85)/(2.2 - 2.4) GHz				
X.X-Y.Y: (X.XX - Y.YY) GHz				

9X18A-X.X-Y.YV-P-XT-5

QUANTITY	DESCRIPTION	PART NO	FINISH	REV
1				3
1				2
1				1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRACTIONS TO DECIMALS ANGLES ± 1/64 .002 .010 ± .1°	ORIGINAL DESIGN	ANTCOM CORP. TORRANCE CALIFORNIA
TOLERANCE SYM PER ANSI Y14.5	S. HUYNH Mar-12-12	Rx/Tx- Thuraya or Inmarsat/Iridium Antenna
REMOVE ALL SHARP BREAK EXTERNAL EDGES .005 TO .010	S. HUYNH Mar-12-12	
DRILL TO 100% OF SIZE	S. HUYNH Mar-13-14	
SCREEN HOLE SIZE PER MIL-S-8878 PARTS OR A COMMON 1/16 DIA	F. TRAM Mar-13-14	
MACHINED SURFACES 12.5	APPROVED	S. HUYNH Mar-13-14
DO NOT SCALE DRAWING		

NMO Connector Option is Now Available for Some Antennas