



FAA Approved Facility


High Gain L-BAND Antenna, P/N: 9X18A-XX-YYX-A-XX-X

Antenna Mounts/Adapters: <http://www.antcom.com/documents/catalogs/PeripheralAntennaProducts2.pdf>



ANTCOM CORPORATION . 367 Van Ness Way, Suite 602 . Torrance, CA 90501 . Tel: (310) 782-1076 . Fax: (310) 782-1086 . E-mail: antennas@antcom.com . <http://www.antcom.com>

NOTICE OF PROPRIETARY RIGHTS
THIS DOCUMENT CONTAINS CONFIDENTIAL, TECHNICAL DATA INCLUDING TRADE SECRETS PROPRIETARY TO ANTCOM CORP. DISCLOSURE OF THIS DATA TO ANY OTHER PERSON OR COMPANY WITHOUT THE WRITTEN CONSENT OF ANTCOM CORP. IS STRICTLY PROHIBITED WITHOUT PRIOR WRITTEN CONSENT OF ANTCOM CORP.

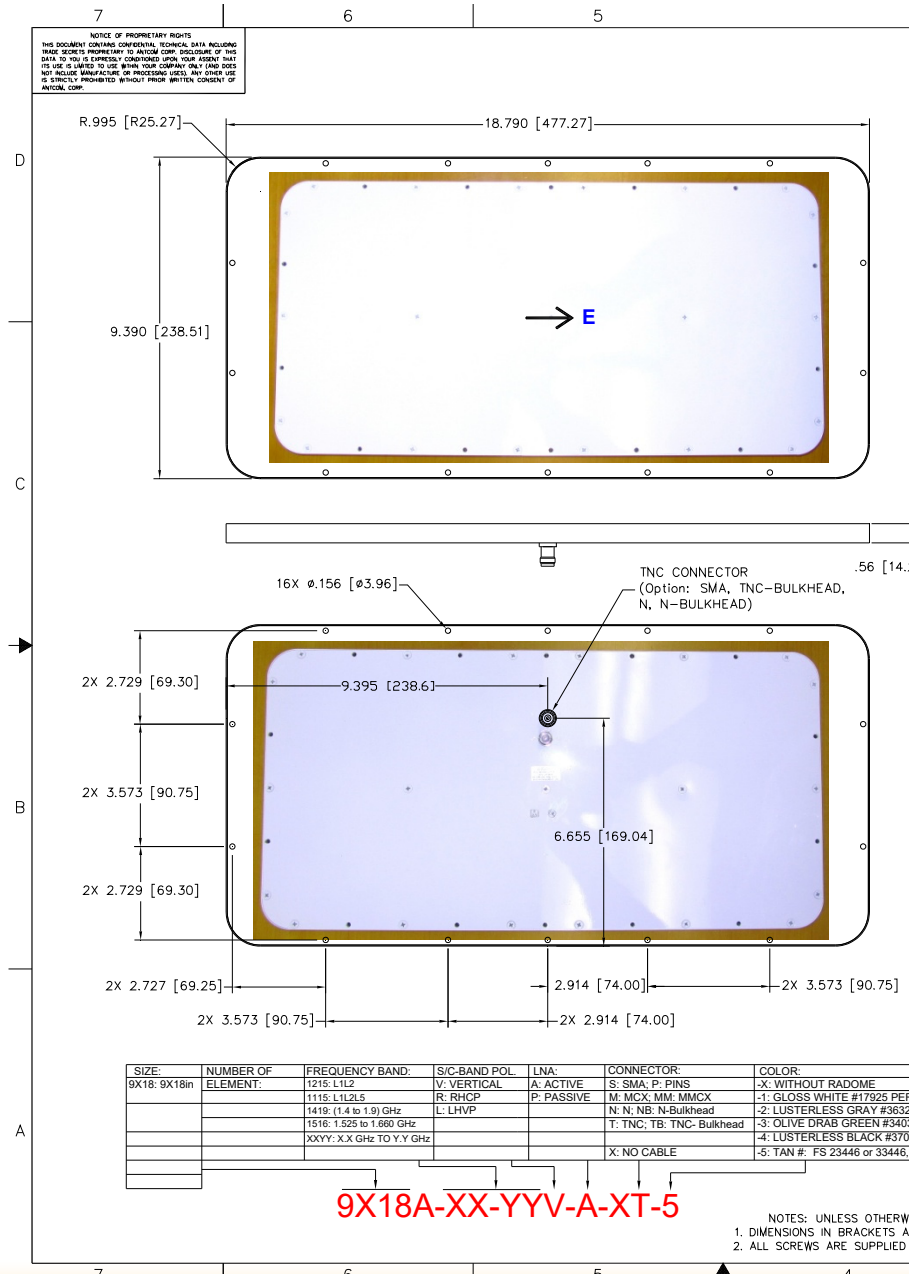

SPECIFICATIONS

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

ELECTRICAL:
FREQUENCY: L-BAND (X.XX - X.XX) GHz - See Below Table for P/N
PATTERN: DIRECTIONAL
POLARIZATION: RHCP, LHCP, or LINEAR - See Below Table for P/N
ANTENNA GAIN: 13 dB
BEAM WIDTH (deg): 20 X 40
VSWR: 2.0:1
OUTPUT IMPEDANCE: 50 ohms
POWER HANDLING: 100 watts
DC GROUNDING: YES

LNA OPTION:
LNA GAIN: 33 dB (P1dBout = +13 dBm)
LNA NOISE FIGURE: 2.2 dB
LNA VOLTAGE: (+2.5 to +24) Volts DC
LNA DRAWING CURRENT: < 30 mA

MECHANICAL:
SIZE: 9.39in x 18.79in x 0.56in
WEIGHT: 2.33 lb (1.06 Kg)
FINISH: SKYDROL RESISTANT POLYURETHANE ENAMEL, AND BLACK ANODIZED
MATERIAL: 6061-T6 ALUMINUM ALLOY BASE COMPOSITE RADOME, IMPACT, ABRASION, UV, SOLVENT, AND SKYDROL RESISTANCE, FIRE RETARDANT
CONNECTOR: TNC FEMALE (OPTION: SMB, SMA, N, MCX, MMCX OR BNC)

ENVIRONMENTAL:
TEMPERATURE: -67 °F TO +185 °F [-55 °C TO +85 °C]
ALTITUDE: 30,000 ft.
VIBRATION: > 20 G's
LEAKAGE: HERMETICALLY SEALED

FEDERAL & MILITARY SPECIFICATIONS:
DESIGN TO: FAA TSO-C144, DO-160D, D0-228, MIL-C-5541, MIL-E-5400, MIL-I-45208A, MIL-STD-810, AND SAE J1455

SIZE:	NUMBER OF ELEMENTS:	FREQUENCY BAND:	S/C-BAND POL.	LNA:	CONNECTOR:	COLOR:
9X18: 9X18in	1215: L1L2	1115: L1L2L5	V: VERTICAL	A: ACTIVE	S: SMA; P: PINS	X: WITHOUT RADOME
	1419: (1.4 to 1.9) GHz	L: LHVP	R: RHCP	P: PASSIVE	M: MCX; MM: MMCX	-1: GLOSS WHITE #17925 PER FED-STD-595B
	1516: 1.525 to 1.660 GHz				N: N; NB: N-Bulkhead	-2: LUSTERLESS GRAY #36320 PER FED-STD-595B
	XXYY: XX GHz TO Y Y GHz				T: TNC; TB: TNC-Bulkhead	-3: OLIVE DRAB GREEN #34031 PER FED-STD-595B
					X: NO CABLE	-4: LUSTERLESS BLACK #37038 PER FED-STD-595B
						-5: TAN # FS 23446 or 33446, FED-STD-595

9X18A-XX-YYV-A-XT-5

NOTES: UNLESS OTHERWISE SPECIFIED:
 1. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS [mm]
 2. ALL SCREWS ARE SUPPLIED BY ANTCOM CORPORATION

QUANTITY	DESCRIPTION	PART NO	FINISH	ITEM NO.
1	OPTIONAL XFL RF CABLE	SMA-M-LRM200-XFL-SMB-M		3
1	1/3-20 ANTENNA MOUNT	HGX-PMT03		1

UNLESS OTHERWISE SPECIFIED		ANTCOM CORP. TORRANCE CALIFORNIA	
DRAWINGS ARE IN INCHES	TOLERANCES ARE:	DATE	ENGINEER
FRACTIONS: XX/100	ANGLES: ± 1'	3C3VE1	S. HUYNH
DECIMALS: ± 0.005	SCREW HEADS PER MIL-E-8879	DATE	APPROVED
HOLES: ± 0.010	BASED ON A COMMON 1/2" DIA	Mar-12-12	Mar-12-12
MACHINED SURFACES: ± 0.005	DO NOT SCALE DRAWING	SCALE	1/1

NMO Connector Option is Now Available for Some Antennas