


NOTICE OF PROPRIETARY RIGHTS
THIS DOCUMENT CONTAINS CONFIDENTIAL, TECHNICAL DATA INCLUDING TRADE SECRETS PROPRIETARY TO ANTCOM CORP. DISCLOSURE OF THIS DATA TO YOU IS EXPRESSLY CONDITIONED UPON YOUR AGREEMENT THAT ITS USE IS LIMITED TO USE WITHIN YOUR COMPANY ONLY AND DOES NOT INCLUDE MANUFACTURE OR REPRODUCING IDEAS. ANY OTHER USE IS STRICTLY PROHIBITED WITHOUT PRIOR WRITTEN CONSENT OF ANTCOM CORP.

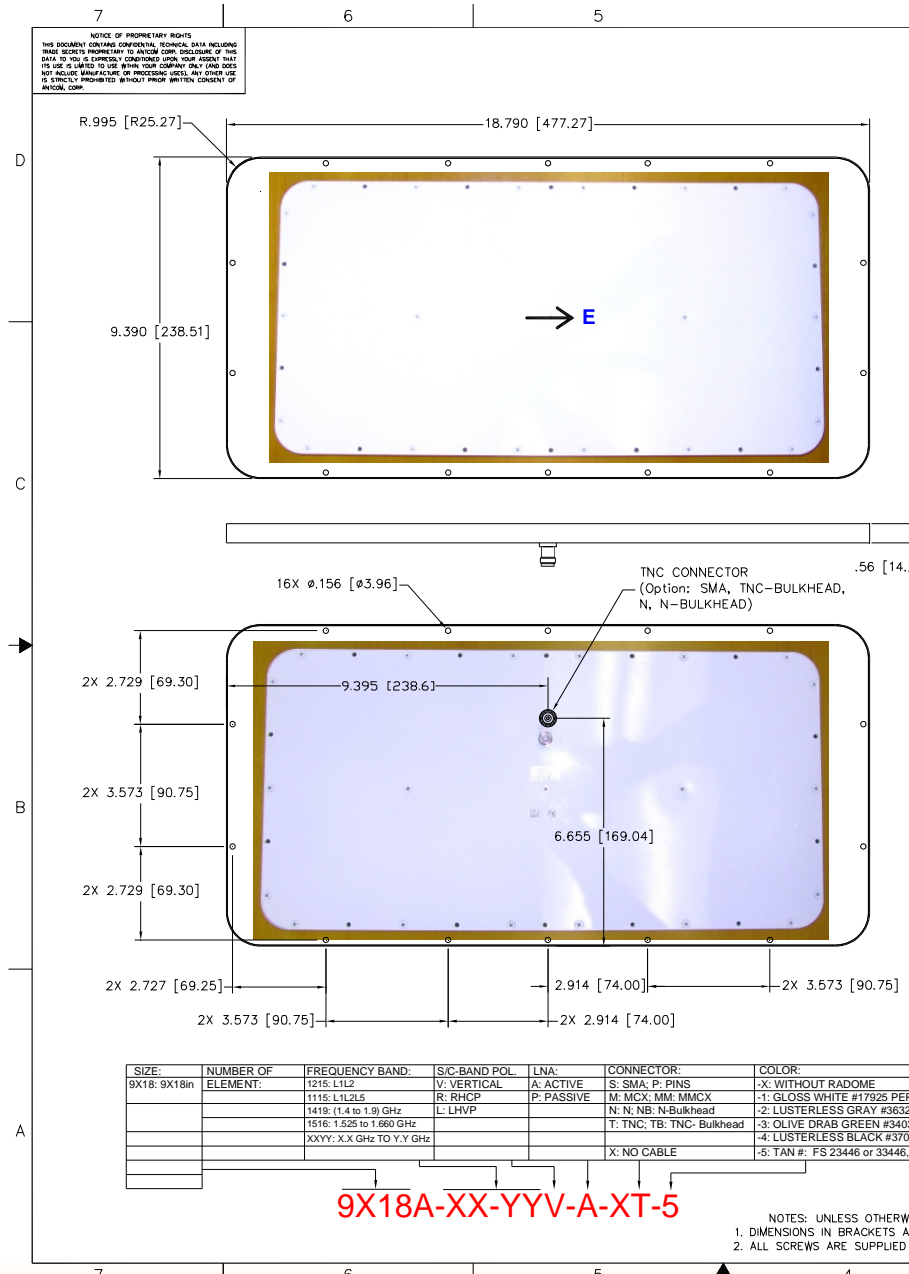

SPECIFICATIONS

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

ELECTRICAL:
FREQUENCY: L-BAND (X.XX - X.XX) GHz - See Below Table for P/N
PATTERN: DIRECTIONAL
POLARIZATION: RHCP, LHCP, or LINEAR - See Below Table for P/N
ANTENNA GAIN: 13 dB
BEAM WIDTH (deg): 20 X 40
VSWR: 2.0:1
OUTPUT IMPEDANCE: 50 ohms
POWER HANDLING: 100 watts
DC GROUNDING: YES

LNA OPTION:
LNA GAIN: 33 dB (P1dBout = +13 dBm)
LNA NOISE FIGURE: 2.2 dB
LNA VOLTAGE: (+2.5 to +24) Volts DC
LNA DRAWING CURRENT: < 30 mA

MECHANICAL:
SIZE: 9.39in x 18.79in x 0.56in
WEIGHT: 2.33 lb (1.06 Kg)
FINISH: SKYDROL RESISTANT POLYURETHANE ENAMEL, AND BLACK ANODIZED
MATERIAL: 6061-T6 ALUMINUM ALLOY BASE COMPOSITE RADOME, IMPACT, ABRASION, UV, SOLVENT, AND SKYDROL RESISTANCE, FIRE RETARDANT
CONNECTOR: TNC FEMALE (OPTION: SMB, SMA, N, MCX, MMCX OR BNC)

ENVIRONMENTAL:
TEMPERATURE: -67 °F TO +185 °F [-55 °C TO +85 °C]
ALTITUDE: 30,000 ft.
VIBRATION: > 20 G's
LEAKAGE: HERMETICALLY SEALED

FEDERAL & MILITARY SPECIFICATIONS:
DESIGN TO: FAA TSO-C144, DO-160D, D0-228, MIL-C-5541, MIL-E-5400, MIL-I-45208A, MIL-STD-810, AND SAE J1455

SIZE:	NUMBER OF ELEMENTS:	FREQUENCY BAND:	S/C-BAND POL.	LNA:	CONNECTOR:	COLOR:
9X18: 9X18in	1215: L1L2	1115: L1L2L5	V: VERTICAL	A: ACTIVE	S: SMA; P: PINS	X: WITHOUT RADOME
	1419: (1.4 to 1.9) GHz	L: LHVP	R: RHCP	P: PASSIVE	M: MCX; MM: MMCX	-1: GLOSS WHITE #17925 PER FED-STD-595B
	1516: 1.525 to 1.660 GHz				N: N; NB: N-Bulkhead	-2: LUSTERLESS GRAY #36320 PER FED-STD-595B
	XXYY: X.X GHz TO Y.Y GHz				T: TNC; TB: TNC- Bulkhead	-3: OLIVE DRAB GREEN #34031 PER FED-STD-595B
					X: NO CABLE	-4: LUSTERLESS BLACK #37038 PER FED-STD-595B
						-5: TAN #: FS 23446 or 33446, FED-STD-595

9X18A-XX-YYV-A-XT-5

NOTES: UNLESS OTHERWISE SPECIFIED:
 1. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS [mm]
 2. ALL SCREWS ARE SUPPLIED BY ANTCOM CORPORATION

QTY	DESCRIPTION	PART NO	FINISH	ITEM NO.
1	OPTIONAL XFI RF CABLE	SMA-M-LRM200-XFI-SMB-M	-	3
1	1/3-20 ANTENNA MOUNT	HGX-PMTO3	-	1

UNLESS OTHERWISE SPECIFIED	ANTCOM CORP.
DRAWINGS ARE IN INCHES	TORRANCE CALIFORNIA
FRACTIONS ARE 16, 32, 64	
DECIMALS ARE 0.005, 0.010, 0.015, 0.020, 0.030, 0.040, 0.050, 0.060, 0.070, 0.080, 0.090, 0.100	
TOLERANCE SHIP PER ANSI Y14.5	
REMOVE ALL BURRS	
BREAK EXTERNAL EDGES .005 TO .015	
FILLET R .005 TO R .010	
SCREW THREADS PER MIL-E-8879	
BASES ON A COMMON 1/2" DIA	
MACHINED SURFACES	
DO NOT SCALE DRAWING	

DATE	BY	CHKD	APP'D	SCALE	SHEET	OF
3CVE1	S. HUYNH			1/1	1	1