



FAA Approved Facility


# RHCP-Inmarsat Antenna Array, P/N: 9x18A-1.6R-P-XS-1 or LHCP-Thuraya Antenna Array, P/N: 9x18A-1.6L-P-XS-1, (9 x 18 x 0.6)in, Flat Panel, Back Mount Configurations

Antenna Mounts/Adapters: <http://www.antcom.com/documents/catalogs/PeripheralAntennaProducts2.pdf>



ANTCOM CORPORATION . 367 Van Ness Way, Suite 602 . Torrance, CA 90501 . Tel: (310) 782-1076 . Fax: (310) 782-1086 . E-mail: [antennas@antcom.com](mailto:antennas@antcom.com) . <http://www.antcom.com>

**NOTICE OF PROPRIETARY RIGHTS**  
THIS DOCUMENT CONTAINS CONFIDENTIAL TECHNICAL DATA INCLUDING TRADE SECRETS PROPRIETARY TO ANTCOM CORP. DISCLOSURE OF THIS DATA TO ANY OTHER PARTY IS EXPRESSLY PROHIBITED. YOUR ACCEPTANCE OF THIS DOCUMENT IS LIMITED TO USE WITHIN YOUR COMPANY ONLY AND DOES NOT INCLUDE MANUFACTURE OR REPRODUCTION. ANY OTHER USE IS EXPRESSLY PROHIBITED WITHOUT PRIOR WRITTEN CONSENT OF ANTCOM CORP.

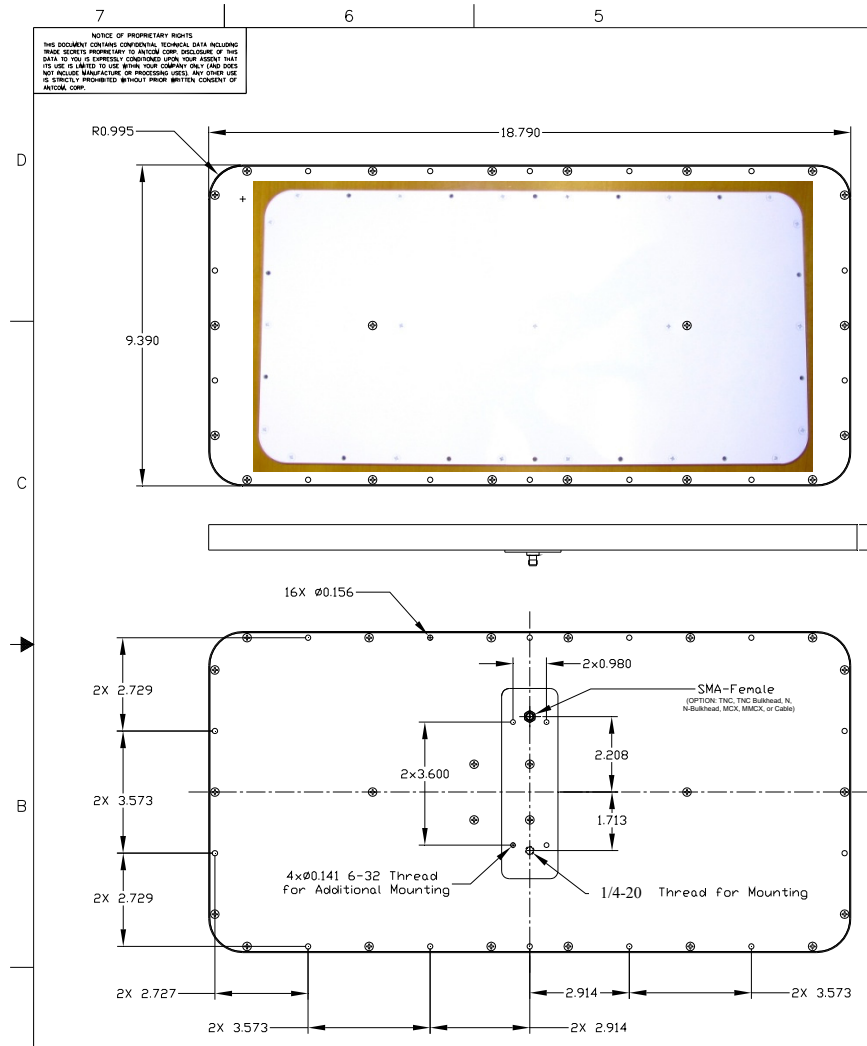

## SPECIFICATIONS

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

**ELECTRICAL:**  
 FREQUENCY: L-BAND (1.5250 -1.6605) GHz  
 PATTERN: DIRECTIONAL  
 POLARIZATION: LHCP  
 ANTENNA GAIN : >15 dBic  
 BEAM WIDTH (deg): 35  
 VSWR: 1.5:1  
 OUTPUT IMPEDANCE: 50 ohms  
 POWER HANDLING: 100 watts  
 DC GROUNDING: YES

**AUTO TRACK OPTION:**  
 TRACKING: 360 Deg Azimuth @ (0.04 to 0.9) Deg/Sec  
 TRACKING MODE: Sum/Different Mode, or Beacon Signal Level: >100 mV Demodulated DC  
 ACQUISITION TIME: <35 sec @ (10 deg/sec)  
 DC POWER SUPPLY: +24 Vdc/3 Amp.

**MECHANICAL:**  
 SIZE: 9.6in x 18.9in x 0.75in  
 WEIGHT: 1.35 lb (612 grams)  
 FINISH: SKYDROL RESISTANT POLYURETHANE ENAMEL, AND BLACK ANODIZED  
 MATERIAL: 6061-T6 ALUMINUM ALLOY BASE COMPOSITE RADOME, IMPACT, ABRASION, UV, SOLVENT, AND SKYDROL RESISTANCE, FIRE RETARDANT  
 CONNECTOR: SMA FEMALE CONNECTING TO 10m COMBINER SMB CABLE (OPTION: SMB, SMA, N, MCX, MMCX OR CABLES)

**ENVIRONMENTAL:**  
 TEMPERATURE: -67 °F TO +185 °F [-55 °C TO +85 °C]  
 ALTITUDE: 30,000 ft.  
 VIBRATION: > 20 G's  
 LEAKAGE: HERMETICALLY SEALED

**FEDERAL & MILITARY SPECIFICATIONS:**  
**DESIGN TO:** FAA TSO-C144, DO-160D, D0-228, MIL-C-5541, MIL-E-5400, MIL-I-45208A, MIL-STD-810, AND SAE J1455

SIZE:	NUMBER OF ELEMENT	FREQUENCY BAND:	S/C-BAND POL:	CONNECTOR:	COLOR:
9X18: 9X18in		1516: 1525 to 1660 MHz	V: VERTICAL R: RHCP L: LHCP	S: SMA; P: PINS M: MCX; MM: MMCX N: N; NB: N-Bulkhead T: TNC; TB: TNC- Bulkhead	X: WITHOUT RADOME -1: GLOSS WHITE #17925 PER FED-STD-595B -2: LUSTERLESS GRAY #36320 PER FED-STD-595B -3: OLIVE DRAB GREEN #34031 PER FED-STD-595B -4: LUSTERLESS BLACK #37038 PER FED-STD-595B -5: TAN #: FS Z3446 or 33446, FED-STD-595

**9X18A-1516L-P-XS-1**

NOTES: UNLESS OTHERWISE SPECIFIED:  
 1. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS [mm]  
 2. ALL SCREWS ARE SUPPLIED BY ANTCOM CORPORATION

QUANTITY	DESCRIPTION	PART NO	FINISH	ITEM NO.
1	OPTIONAL XIT RF CABLE	SMA-M-LRM200-XIT-SMB-M		3
1	1/3-20 ANTENNA MOUNT	HGX-PMTO3		1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	ANTCOM CORP.
FRACTIONS DECIMALS ± 1/64 ± 0.0025 ± 1/32 ± 0.005 ± 1/16 ± 0.010	TORRANCE CALIFORNIA
REMOVE ALL BURRS BREAK EXTERNAL EDGES .005 TO .015 FILED TO .005 TO .015 FILERS TO .005 TO .015 DAYS ON A COMMON 1/2/008 MACHINED SURFACES	(1.525 -1.660) GHz L-BAND LHCP THURAYA ANTENNA ARRAY
TOLERANCE 5M PER ANSI Y14.5	ENGINEER
APPROVED S. HUYNH June-08-08	SCALE 1/1
DO NOT SCALE DRAWING	SHEET 1 OF 1

NMO Connector Option is Now Available for Some Antennas