






FAA Approved Facility

New Ruggedized, High Corrosion/High Environmental Resistant Helix Antennas
Inmarsat/Iridium/L1GPS/Glonass/Omnistar: P/N: *B1NR-X-XX-U-XXX*, **Iridium/L1GPS/Glonass/Omnistar:** P/N: *B1RR-X-XX-U-XXX*,
Thuraya/Tx-Globalstar: P/N: *BTL-X-XX-U-XXX*, **Active L1GPS:** P/N: *BL1-A-XX-U-XXX*,
Active L1GPS/Glonass/L-Band: P/N: *BG3-A-XX-U-XXX*, **for Active L1/L2:** P/N: *BL1L2-A-XX-U-XXX*
 for Buoy, Marines, Underways, Ground, Weather Balloon, and Helicopter Applications
 Also Available in other Mounting Configurations of 3G, 4G, 42G, 5G, S5, Mini-Arinc, and Arinc-743 Antenna Series
Antenna Mounts/Adapters: <http://www.antcom.com/documents/catalogs/PeripheralAntennaProducts2.pdf>



ANTCOM CORPORATION . 367 Van Ness Way, Suite 602 . Torrance, CA 90501 . Tel: (310) 782-1076 . Fax: (310) 782-1086 . E-mail: antennas@antcom.com . <http://www.antcom.com>

NOTICE OF PROPRIETARY RIGHTS
 THIS DOCUMENT CONTAINS CONFIDENTIAL, TECHNICAL DATA INCLUDING TRADE SECRETS PROPRIETARY TO ANTCOM CORP. REPRODUCTION OF THIS DATA TO YOU IS EXPRESSLY CONDITIONED UPON YOUR ASSENT THAT ITS USE IS LIMITED TO USE WITHIN YOUR COMPANY AND THAT YOU WILL NOT REPRODUCE, MANUFACTURE OR PRODUCE METEOR. ANY OTHER USE IS STRICTLY PROHIBITED WITHOUT PRIOR WRITTEN CONSENT OF ANTCOM CORP.

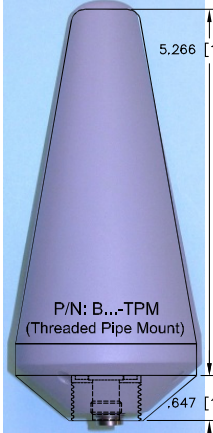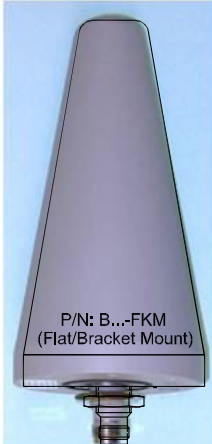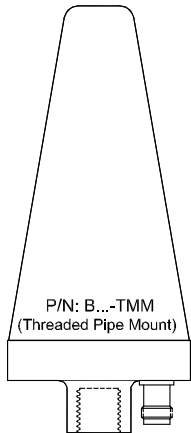


ELECTRICAL: SPECIFICATIONS

ZONE	REVISIONS					
	REV	DESCRIPTION	DATE	APPROVED		
FREQUENCY (MHz):	(1575.42 ±15)	(1542.50 ±17.5)	(1642.50 ±17.5)	(1598 - 1609)	(1610-1626.5)	(1217.42 ±15)
GAIN (dBic) in FS/4ft GP	L1 GPS	Rx Inmarsat/B1 or Thuraya	Tx Inmarsat or Thuraya	GLONASS	IRIDIUM or Tx Globalstar	L2 GPS for L1/L2 Version
@ 90° (Zenith):	+1.1/+3.7	+0.7/+1.5	-0.3/0.0	+0.5/+2.9	+0.1/+1.1	0.0
@ 10° Elevation:	-0.9/+0.0	-1.6/-1.3	-1.9/-1.0	-1.3/+0.2	-1.6/-0.8	-2.4 to -6.3
@ 20° Elevation:	-0.2/+2.0	-0.8/+1.0	-1.1/+1.2	-0.5/+2.4	-0.8/+1.2	-1.8 to -4.8
@ 30° Elevation:	+0.3/+2.0	-0.2/+1.0	-0.8/+0.4	+0.1/+2.1	-0.7/+1.1	-1.3 to -3.4
@ 45° Elevation:	+0.6/+1.5	+0.3/+0.6	-0.7/-0.8	-0.1/+1.0	-0.3/-0.3	-0.5 to -1.5
@ 70° Elevation:	+0.3/+1.3	+0.3/+0.4	-1.6/0.0	-0.3/+1.1	-0.7/0.0	0.0 to -0.5
BEAM WIDTH (3dB)	173/155 Deg.	173/155 Deg.	180/162 Deg.	180/162 Deg.	180/162 Deg.	120/165 Deg.
AXIAL RATIO (dB)	1 to 3	1 to 3	1 to 3	1 to 3	1 to 3	1 to 5
RADIATION PATTERN:	HEMISPHERICAL					
POLARIZATION:	RHCP	RHCP or LHCP	RHCP or LHCP	RHCP	RHCP or LHCP	RHCP
VSWR:	< 2:1					
DC GROUNDING:	YES (LIGHTNING PROTECTION)					

LNA OPTION (for GNSS or GNSS/Rx only VERSIONS (-A-/-)):

LNA GAIN (OPTION):	33 dB
LNA NOISE FIGURE:	3.0 dB
LNA P1dB Out:	+13 dBm
LNA DC POWER:	(2.5 to 24) V / < 50mA
POWER HANDLING:	PASSIVE: 10W; LNA ACTIVE: 1 Watt CW


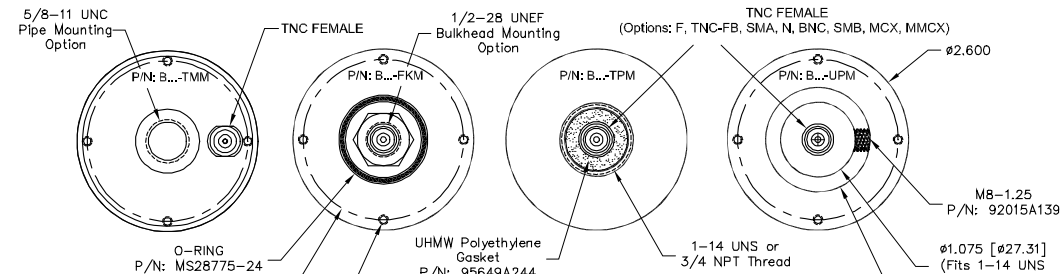


MECHANICAL:
 SIZE: DIAMETER: 2.60in. [66 mm]
 HEIGHT: 5.266 in. [133 mm]
 WEIGHT: < 8oz. (226g)
 FINISH: HERMETICALLY SEAL & TEFLON COATED

MATERIAL: 6061-T6 ALUMINUM ALLOY BASE & RUGGEDIZED RADOME IMPACT, ABRASION, UV, SOLVENT, SKYDROL, CORROSION RESISTANCE, AND FIRE RETARDANT
CONNECTOR: TNC FEMALE (OPTION: TNC-BK, F, SMA, BNC, N, MCX, MMCX)

ENVIRONMENTAL:
 TEMPERATURE: -95 °F to +194 °F [-70 °C to +90 °C]
 -700ft to +70,000 ft. (for -U-FKM-U-TPM, from Mounting Surface)
 VIBRATION: 30 G's
 HERMETICALLY SEAL

FEDERAL & MILITARY SPECIFICATIONS:
 FAA TSO-C144, DO-160D, DO-228, MIL-C-5541, MIL-E-5400, MIL-45208A, MIL-STD-810, MIL-STD-461E/F, AND SAE J1455
ACCEPTANCE TEST PROCEDURE: ATP-GPS-L1L2-100

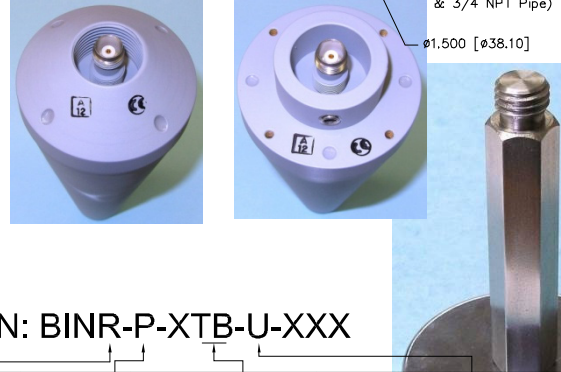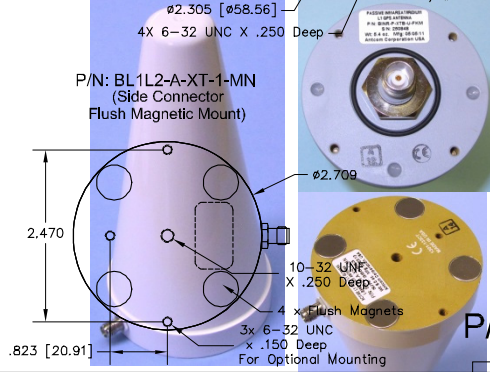

5/8-11 Magnetic Standoff Antenna Mount, P/N: MTR-3M (Item 484c)

FREQUENCY (GHz):	POLARIZATION:	LNA:	FEMALE CONNECTOR:	COLOR: -U: TEFLON COATED GRAY for IMMUNES/BUOY APP.
IN: Inmarsat/Iridium/L1GPS/Glonass (RHCP); IR/Iridium/L1GPS/Glonass (RHCP)	R: RHCP	P: PASSIVE	T: TNC; TB: TNC-Bulkhead; F: F	-1: GLOSS WHITE #17925 PER FED-STD-595B PAINT
T: Thuraya/Tx Globalstar (LHCP); G: Tx only Globalstar (LHCP)	L: LHCP	A: WITH	S: SMA; SMB; SMBR; B: BNC	-2: LUSTERLESS GRAY #38320 PER FED-STD-595B PAINT
L1: L1 GPS Only; G3: L1 GPS/GLONASS/L-Band/B1; L1L2:L1/L2 GPS only	R: RHCP	LNA/FILTERS for	M: MCX; MM; MMCX; MMR; MMCX-R	-3: OLIVE DRAB GREEN #34094 PER FED-STD-595B PAINT
G5: L1/L2 GPS/GLONASS/L-Band/B1/B3/B2/L5	R: RHCP	Rx only VERSIONS	N: N/N-Bulkhead	-4: LUSTERLESS BLACK #37038 PER FED-STD-595B PAINT
Lo1: QUAD-BAND (GSM/PCS/L-Band/Locast/M-FIS/C-Band)	V: Linear (Vertical)		S: SMC, SSMC, SSMB, SSMA	-5: TAN #; FS 23446 or 33446, FED-STD-595 PAINT

QUANTITY REQD	DESCRIPTION	PARTS LIST	PART NO	REV
2	Additional SILICON GASKET (Item 539a) for -FKM	3G15P100-2-2G		1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRACTIONS TOLERANCES ARE DECIMALS ANGLES DECIMALS ± 1°

ANTCOM CORP. TORRANCE CALIFORNIA

Inmarsat/Iridium/L1GPS, or Thuraya/Tx-Globalstar or L1-GPS, or L1-GPS/Glonass/L-Band/B1, or L1/L2-GPS, or L1/L2-GPS/Glonass/B1/B3/B2/L5

SCALE 1/1

SHEET 1 OF 1

NMO Connector Option is Now Available for Some Antennas