




New Ruggedized, High Corrosion/Harsh Environmental Resistant Helix Antennas
 Inmarsat/Iridium/L1GPS/Glonass/Omnistar: P/N: B1NR-X-XX-U-XXX, Iridium/L1GPS/Glonass/Omnistar: P/N: B1RR-X-XX-U-XXX,
 Thuraya/Tx-Globalstar: P/N: BTL-X-XX-U-XXX, Active L1 GPS: P/N: BL1-A-XX-U-XXX,
 Active L1 GPS/Glonass/L-Band: P/N: BG3-A-XX-U-XXX, for Active L1/L2: P/N: BL1L2-A-XX-U-XXX
 for Buoy, Marines, Underwater, Ground, Weather Balloon, and Helicopter Applications







Also Available in other Mounting Configurations of 3G, 4G, 42G, 5G, S5, Mini-Arinc, and Arinc-743 Antenna Series

ISO 9001:2008/FAA Approved Facility Antenna Mounts: <http://www.antcom.com/documents/catalogs/PeripheralAntennaProducts2.pdf>

ANTCOM CORPORATION . 367 Van Ness Way, Suite 602 . Torrance, CA 90501 . Tel: (310) 782-1076 . Fax: (310) 782-1086 . E-mail: antennas@antcom.com . <http://www.antcom.com>

NOTICE OF PROPRIETARY RIGHTS
 THIS DOCUMENT CONTAINS CONFIDENTIAL, TECHNICAL DATA INCLUDING TRADE SECRETS PROPRIETARY TO ANTCOM CORP. UNLESS OTHERWISE STATED, THIS DATA IS YOURS TO USE WITHIN YOUR COMPANY ONLY AND DOES NOT INCLUDE MANUFACTURE OR PRODUCTION METALS. ANY OTHER USE OR REPRODUCTION IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT OF ANTCOM CORP.

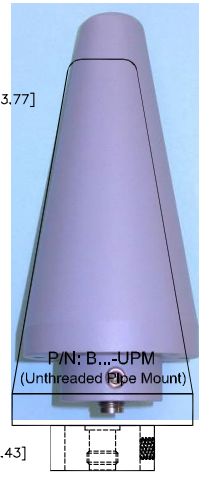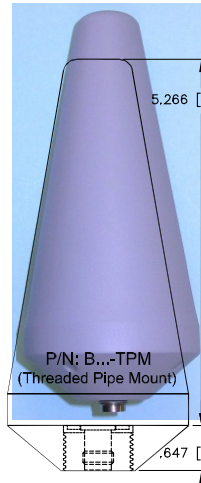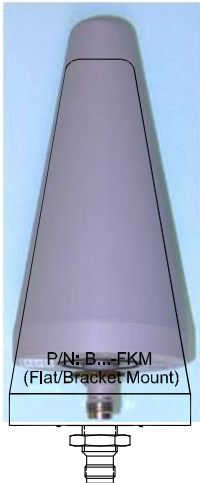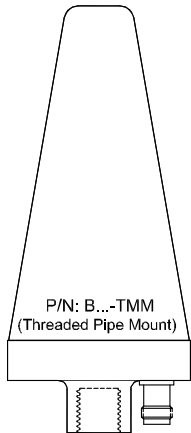

ELECTRICAL:

FREQUENCY (MHz):	REVISIONS					
	ZONE	REV	DESCRIPTION	DATE	APPROVED	
(1575.42 ±15)	(1542.50 ±17.5)	(1642.50 ±17.5)	(1598 - 1609)	(1610-1626.5)	(1217.42 ±15)	
GAIN (dBic) in FS/4ft GP	L1 GPS	Rx Inmarsat/B1 or Thuraya	Tx Inmarsat or Thuraya	GLONASS	IRIDIUM or Tx Globalstar	L2 GPS for L1/L2 Version
@ 90° (Zenith):	+1.1/+3.7	+0.7/+1.5	-0.3/0.0	+0.5/+2.9	+0.1/+1.1	0.0
@ 10° Elevation:	-0.9/+0.0	-1.6/-1.3	-1.9/-1.0	-1.3/+0.2	-1.6/-0.8	-2.4 to -6.3
@ 20° Elevation:	-0.2/+2.0	-0.8/+1.0	-1.1/+1.2	-0.5/+2.4	-0.8/+1.2	-1.8 to -4.8
@ 30° Elevation:	+0.3/+2.0	-0.2/+1.0	-0.8/+0.4	+0.1/+2.1	-0.7/+1.1	-1.3 to -3.4
@ 45° Elevation:	+0.6/+1.5	+0.3/+0.6	-0.7/-0.8	-0.1/+1.0	-0.3/-0.3	-0.5 to -1.5
@ 70° Elevation:	+0.3/+1.3	+0.3/+0.4	-1.6/0.0	-0.3/+1.1	-0.7/0.0	0.0 to -0.5
BEAM WIDTH (3dB)	173/155 Deg.	173/155 Deg.	180/162 Deg.	180/162 Deg.	180/162 Deg.	120/165 Deg.
AXIAL RATIO (dB)	1 to 3	1 to 3	1 to 3	1 to 3	1 to 3	1 to 5
RADIATION PATTERN:	HEMISPHERICAL					
POLARIZATION:	RHCP	RHCP or LHCP	RHCP or LHCP	RHCP	RHCP or LHCP	RHCP
VSWR:	< 2:1					
DC GROUNDING:	YES (LIGHTNING PROTECTION)					



LNA OPTION (for GNSS or GNSS/Rx only VERSIONS (-A-/-)):

LNA GAIN (OPTION):	33 dB
LNA NOISE FIGURE:	3.0 dB
LNA P1dB Out:	+13 dBm
LNA DC POWER:	(2.5 to 24) V / < 50mA
POWER HANDLING:	PASSIVE: 10W; LNA ACTIVE: 1 Watt CW

MECHANICAL:

SIZE:	DIAMETER: 2.60in. [66 mm] HEIGHT: 5.266 in. [133 mm]
WEIGHT:	< 8oz. (226g)
FINISH:	HERMETICALLY SEAL & TEFLON COATED
MATERIAL:	6061-T6 ALUMINUM ALLOY BASE & RUGGEDIZED RADOME IMPACT, ABRASION, UV, SOLVENT, SKYDROL, CORROSION RESISTANCE, AND FIRE RETARDANT
CONNECTOR:	TNC FEMALE (OPTION: TNC-BK, F, SMA, BNC, N, MCX, MMCX)
ENVIRONMENTAL:	TEMPERATURE: -95 °F TO +194 °F [-70 °C TO +90 °C] -700ft to + 70,000 ft. (for -U-FKM-U-TPM, from Mounting Surface) VIBRATION: 30 G's HERMETICALLY SEAL
FEDERAL & MILITARY SPECIFICATIONS:	FAA TSO-C144, DO-160D, DO-228, MIL-C-5541, MIL-E-5400, MIL-45208A, MIL-STD-810, MIL-STD-461E/F, AND SAE J1455
ACCEPTANCE TEST PROCEDURE:	ATP-GPS-L1L2-100

NMO Connector Option is Now Available for Some Antennas

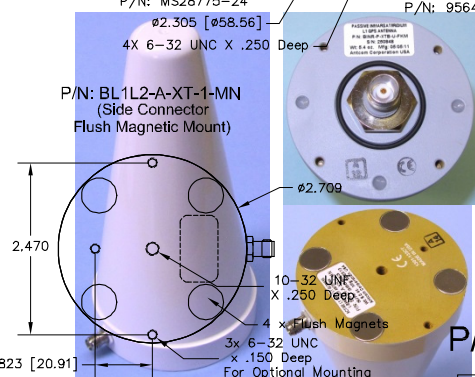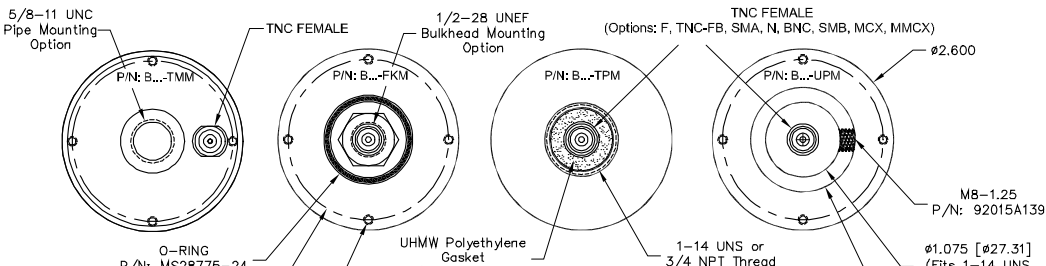

P/N: BINR-P-XTB-U-XXX

FREQUENCY (GHz):	POLARIZATION:	LNA:	FEMALE CONNECTOR:	COLOR: -U: TEFLON COATED GRAY for IMMUNES/BUOY APP.
In: Inmarsat/Iridium/L1GPS/Glonass (RHCP); Iridium/L1GPS/Glonass (RHCP)	R: RHCP	P: PASSIVE	T: TNC; TB: TNC-Bulkhead; F: F	-1: GLOSS WHITE #17925 PER FED-STD-595B PAINT
T: Thuraya/Tx Globalstar (LHCP); G: Tx only Globalstar (LHCP)	L: LHCP	A: With	S: SMA; SMB; SMBR; B: BNC	-2: LUSTERLESS GRAY #38320 PER FED-STD-595B PAINT
L1: L1 GPS Only; G3: L1 GPS/GLONASS/L-Band/B1; L1L2:L1/L2 GPS only	R: RHCP	LNA/FILTERS for	M: MCX; MM; MMCX; MMR; MMCX-R	-3: OLIVE DRAB GREEN #34094 PER FED-STD-595B PAINT
G5: L1/L2 GPS/GLONASS/L-Band/B1/B3/B2/L5	R: RHCP	Rx only VERSIONS	N: N/N-Bulkhead	-4: LUSTERLESS BLACK #37038 PER FED-STD-595B PAINT
Lo1: QUAD-BAND (GSM/PCS/L-Band/Locatar/M-FIS/C-Band)	V: Linear (Vertical)		S: SMC, SSMC, SSMB, SSMA	-5: TAN #; FS 23446 or 33446, FED-STD-595 PAINT

5/8-11 Magnetic Standoff Antenna Mount, P/N: MTR-3M (Item 484c)

QUANTITY REQD	DESCRIPTION	PARTS LIST	PART NO	REV
2				
1	Additional SILICON GASKET (Item 539a) for -FKM	3G15P100-2-2G		1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		ANTCOM CORP. TORRANCE CALIFORNIA	
FRACTION	TOLERANCE	ANGLES	SCALE
1/64	±.005	±1°	
3/64	±.005		
1/16	±.005		
3/16	±.005		
1/4	±.005		
3/8	±.005		
1/2	±.005		
3/4	±.005		
1	±.005		
2	±.005		
3	±.005		
4	±.005		
5	±.005		
6	±.005		
7	±.005		
8	±.005		
9	±.005		
10	±.005		
11	±.005		
12	±.005		
13	±.005		
14	±.005		
15	±.005		
16	±.005		
17	±.005		
18	±.005		
19	±.005		
20	±.005		
21	±.005		
22	±.005		
23	±.005		
24	±.005		
25	±.005		
26	±.005		
27	±.005		
28	±.005		
29	±.005		
30	±.005		
31	±.005		
32	±.005		
33	±.005		
34	±.005		
35	±.005		
36	±.005		
37	±.005		
38	±.005		
39	±.005		
40	±.005		
41	±.005		
42	±.005		
43	±.005		
44	±.005		
45	±.005		
46	±.005		
47	±.005		
48	±.005		
49	±.005		
50	±.005		
51	±.005		
52	±.005		
53	±.005		
54	±.005		
55	±.005		
56	±.005		
57	±.005		
58	±.005		
59	±.005		
60	±.005		
61	±.005		
62	±.005		
63	±.005		
64	±.005		
65	±.005		
66	±.005		
67	±.005		
68	±.005		
69	±.005		
70	±.005		
71	±.005		
72	±.005		
73	±.005		
74	±.005		
75	±.005		
76	±.005		
77	±.005		
78	±.005		
79	±.005		
80	±.005		
81	±.005		
82	±.005		
83	±.005		
84	±.005		
85	±.005		
86	±.005		
87	±.005		
88	±.005		
89	±.005		
90	±.005		
91	±.005		
92	±.005		
93	±.005		
94	±.005		
95	±.005		
96	±.005		
97	±.005		
98	±.005		
99	±.005		
100	±.005		