
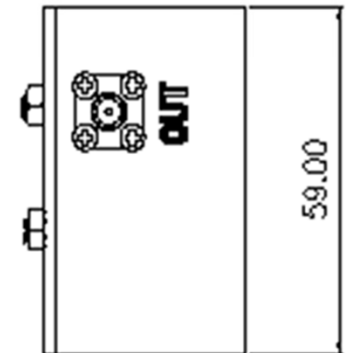
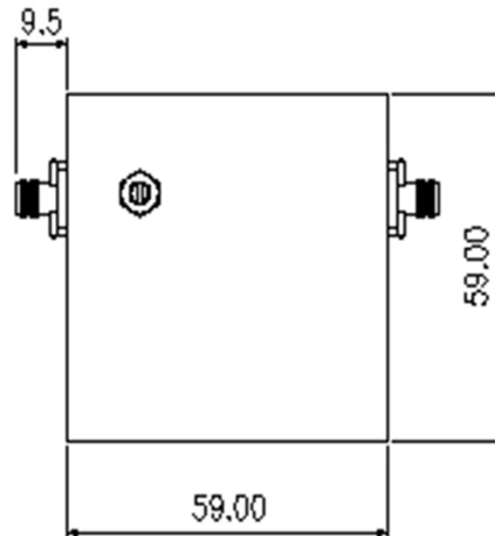
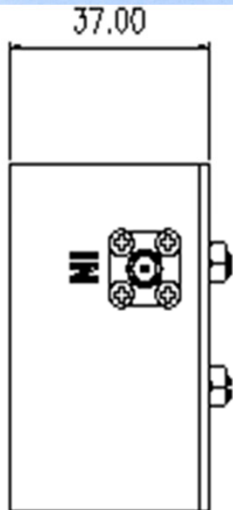


fo [MHz]	BW [MHz]
2492.03	27
RL [dB]	N
23	4
Qu	
3250	
Marker1	2442.03 [MHz]
	-0.050 -39.974
Marker2	2462.03 [MHz]
	-0.211 -21.132
Marker3	2480.03 [MHz]
	-31.150 -0.667
Marker4	2504.03 [MHz]
	-31.150 -0.667
Marker5	2522.03 [MHz]
	-0.211 -21.132
Marker6	2542.03 [MHz]
	-0.050 -39.974

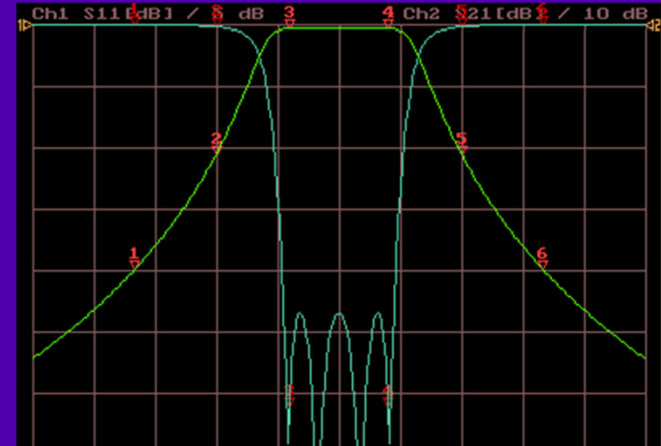

1.0 Materials :

Housing : Silver Plated 6061-T6 Aluminum
 Conector Body : Ternary alloy Plated Brass
 Conector centraer contact : Silver Plated Beryllium Copper
 Conector insulator : PTFE

2.0 Other Specification :

SMA Female Connectors : Mates With MIL-STD-348
 Finish : Painting Black